


Titan 140

Surface Mounted

Type Downlight
Mounting Surface Mounted
Material Aluminium
Adjustable Yes (90°/359°)
El. class / IP Class I / IP20
Warranty: see p.308

Bridgelux Vero 10 LED (350mA)

CCT 2700K / 3000K / 4000K
CRI Ra90 (Ra80 on request)
SDCM 3
Luminous Flux LED
2700K - Ra90: 1100lm (124lm/W)
3000K - Ra90: 1156lm (130lm/W)
4000K - Ra90: 1172lm (132lm/W)
Luminous Flux System
2700K - Ra90: 937lm (92lm/W)
3000K - Ra90: 984lm (96lm/W)
4000K - Ra90: 998lm (98lm/W)
Beam angle 28° / 40°
LED Power 8.9W / 350mA (excl. driver)
System Power 10.2W / 350mA (incl. driver)

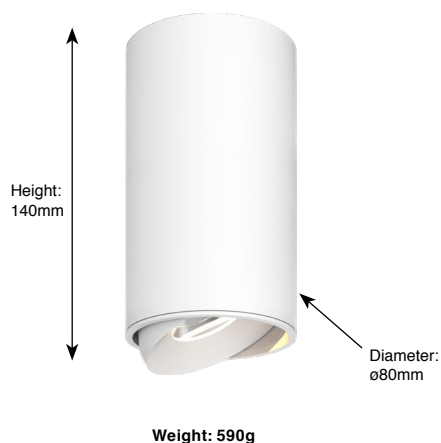

Ceiling mounting on horizontal ceilings only!

- driver integrated in luminaire
- included in article number and price

Data sheets and wiring guide: see website


Optional suspension sets

- Standard connecting box comes in the same color as the luminaire housing
- Mounting accessories included
- Strain relief integrated
- Textile (polyester) power cable included, 2000mm

Luminaire color white: white cable

Luminaire color black, brown, gold, copper, corten: black cable

Luminaire color grey, anthracite: grey cable



On Request

Bridgelux Vero10 CRI Ra97

Suspension set 2000mm

White 2000mm - 3x0.75mm ²	103.03.01-2
White 2000mm - 5x0.75mm ²	103.05.01-2
Black 2000mm - 3x0.75mm ²	103.03.03-2
Black 2000mm - 5x0.75mm ²	103.05.03-2
Grey 2000mm - 3x0.75mm ²	103.03.18-2
Grey 2000mm - 5x0.75mm ²	103.05.18-2



Titan 140

Cone

PRICES INCL. BUILT-IN DRIVER

Non dim

2700K - Ra90 - 10.2W - 937lm	1211.AA.24.927.xx
3000K - Ra90 - 10.2W - 984lm	1211.AA.24.930.xx
4000K - Ra90 - 10.2W - 998lm	1211.AA.24.940.xx

Touch & DALI dim* NEW!

2700K - Ra90 - 10.2W - 937lm	1211.AA.26.927.xx
3000K - Ra90 - 10.2W - 984lm	1211.AA.26.930.xx
4000K - Ra90 - 10.2W - 998lm	1211.AA.26.940.xx

Mains dim (Trailing Edge only) NEW!

2700K - Ra90 - 10.2W - 937lm	1211.AA.27.927.xx
3000K - Ra90 - 10.2W - 984lm	1211.AA.27.930.xx
4000K - Ra90 - 10.2W - 998lm	1211.AA.27.940.xx

*When dimming with touch. Do not combine with other touch dim products



Titan 140

Organic

PRICES INCL. BUILT-IN DRIVER

Non dim

2700K - Ra90 - 10.2W - 937lm	1212.AA.24.927.xx
3000K - Ra90 - 10.2W - 984lm	1212.AA.24.930.xx
4000K - Ra90 - 10.2W - 998lm	1212.AA.24.940.xx

Touch & DALI dim* NEW!

2700K - Ra90 - 10.2W - 937lm	1212.AA.26.927.xx
3000K - Ra90 - 10.2W - 984lm	1212.AA.26.930.xx
4000K - Ra90 - 10.2W - 998lm	1212.AA.26.940.xx

Mains dim (Trailing Edge only) NEW!

2700K - Ra90 - 10.2W - 937lm	1212.AA.27.927.xx
3000K - Ra90 - 10.2W - 984lm	1212.AA.27.930.xx
4000K - Ra90 - 10.2W - 998lm	1212.AA.27.940.xx



Titan 140

Anti-Glare

PRICES INCL. BUILT-IN DRIVER

Non dim

2700K - Ra90 - 10.2W - 937lm	1213.AA.24.927.xx
3000K - Ra90 - 10.2W - 984lm	1213.AA.24.930.xx
4000K - Ra90 - 10.2W - 998lm	1213.AA.24.940.xx

Touch & DALI dim* NEW!

2700K - Ra90 - 10.2W - 937lm	1213.AA.26.927.xx
3000K - Ra90 - 10.2W - 984lm	1213.AA.26.930.xx
4000K - Ra90 - 10.2W - 998lm	1213.AA.26.940.xx

Mains dim (Trailing Edge only) NEW!

2700K - Ra90 - 10.2W - 937lm	1213.AA.27.927.xx
3000K - Ra90 - 10.2W - 984lm	1213.AA.27.930.xx
4000K - Ra90 - 10.2W - 998lm	1213.AA.27.940.xx

28° Reflector: 0000.28.00.000.00
40° Reflector: 0000.40.00.000.00

Available colors: 0000.00.00.000.XX
Other RAL colors on request




01 White Matt Text.
Standard



18 Grey Matt Text.
Standard



03 Black Matt Text.
Standard



25 Smoked Brown Text. Black + Gold Matt
Standard



11 Gold Matt



16 Gold Matt