

Titan Fix

Square

Type	Downlight
Mounting	Recessed
Material	Aluminium
Adjustable	No
El. class / IP	Class III / IP20
El. class driver	Class II
Warranty: see p.308	

Bridgelux Vero 10 LED (350mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90 (Ra80 on request)
SDCM	3
Luminous Flux LED	2700K - Ra90: 1100lm (124lm/W) 3000K - Ra90: 1156lm (130lm/W) 4000K - Ra90: 1172lm (132lm/W)
Luminous Flux System	2700K - Ra90: 937lm (92lm/W) 3000K - Ra90: 984lm (96lm/W) 4000K - Ra90: 998lm (98lm/W)
Beam angle	28° / 40°
LED Power	8.9W / 350mA (excl. driver)
System Power	10.2W / 350mA (incl. driver)
Forward voltage	23V (min.) - 25.5V (typ.) - 28V (max.)


Bridgelux Dim-to-warm LED (250mA)

CCT	Dim-to-warm 1800-3000K
CRI	Ra90
Luminous Flux	LED: 860lm - System: 732lm
LED Power	8.2W / 250mA (excl. driver)
System Power	9.4W / 250mA (incl. driver)

DIM TO WARM



Ø Boobytrap springs: 76-80mm
Ø Trapezium springs: 79-80mm

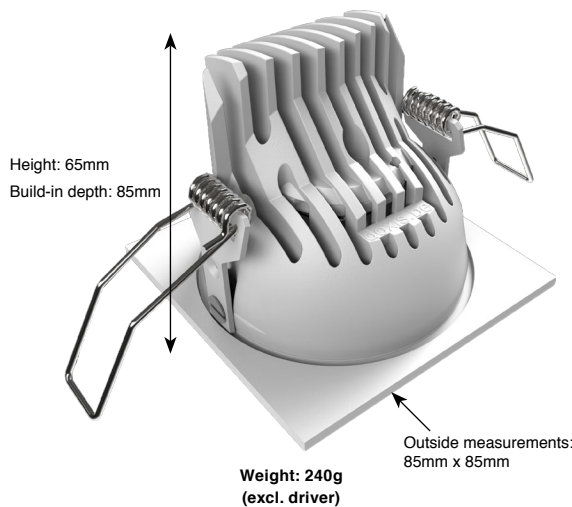


Driver:
- Included in article number and included in price
- External/Remote installation


Data sheets and wiring guide: see website
Driver information: see p.294-295

On Request

Bridgelux Vero10 CRI Ra97

Air circulation notice:
Do not topload with insulation materials



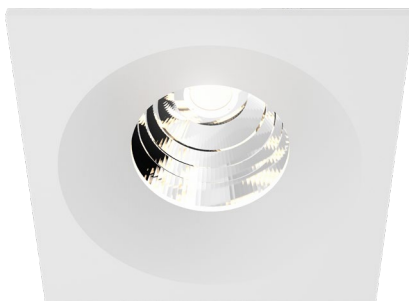

Titan Fix Square

Cone

PRICES INCL. DRIVERS

Non dim (Driver 490.24.16 incl.)

2700K - Ra90 - 10.2W - 937lm	1003.AA.24.927.XX-Y
3000K - Ra90 - 10.2W - 984lm	1003.AA.24.930.XX-Y
4000K - Ra90 - 10.2W - 998lm	1003.AA.24.940.XX-Y

1-10V dim & Push dim (Driver 490.25.20 incl.)

2700K - Ra90 - 10.2W - 937lm	1003.AA.25.927.XX-Y
3000K - Ra90 - 10.2W - 984lm	1003.AA.25.930.XX-Y
4000K - Ra90 - 10.2W - 998lm	1003.AA.25.940.XX-Y

DALI dim (Driver 490.26.20 incl.)

2700K - Ra90 - 10.2W - 937lm	1003.AA.26.927.XX-Y
3000K - Ra90 - 10.2W - 984lm	1003.AA.26.930.XX-Y
4000K - Ra90 - 10.2W - 998lm	1003.AA.26.940.XX-Y

Mains dim (Driver 490.27.20 incl.)

2700K - Ra90 - 10.2W - 937lm	1003.AA.27.927.XX-Y
3000K - Ra90 - 10.2W - 984lm	1003.AA.27.930.XX-Y
4000K - Ra90 - 10.2W - 998lm	1003.AA.27.940.XX-Y

DALI dim / Dim to Warm 1800-3000K (Driver 490.26.20 incl.)

DTW (DALI dim) - 9.4W - 732lm	1003.AA.26.dtw.XX-Y
-------------------------------	---------------------

Mains dim / Dim to Warm 1800-3000K (Driver 497.27.20 incl.)

DTW (mains dim) - 9.4W - 732lm	1003.AA.27.dtw.XX-Y
--------------------------------	---------------------



Titan Fix Square

Organic

PRICES INCL. DRIVERS

Non dim (Driver 490.24.16 incl.)

2700K - Ra90 - 10.2W - 937lm	1001.AA.24.927.XX-Y
3000K - Ra90 - 10.2W - 984lm	1001.AA.24.930.XX-Y
4000K - Ra90 - 10.2W - 998lm	1001.AA.24.940.XX-Y

1-10V dim & Push dim (Driver 490.25.20 incl.)

2700K - Ra90 - 10.2W - 937lm	1001.AA.25.927.XX-Y
3000K - Ra90 - 10.2W - 984lm	1001.AA.25.930.XX-Y
4000K - Ra90 - 10.2W - 998lm	1001.AA.25.940.XX-Y

DALI dim (Driver 490.26.20 incl.)

2700K - Ra90 - 10.2W - 937lm	1001.AA.26.927.XX-Y
3000K - Ra90 - 10.2W - 984lm	1001.AA.26.930.XX-Y
4000K - Ra90 - 10.2W - 998lm	1001.AA.26.940.XX-Y

Mains dim (Driver 490.27.20 incl.)

2700K - Ra90 - 10.2W - 937lm	1001.AA.27.927.XX-Y
3000K - Ra90 - 10.2W - 984lm	1001.AA.27.930.XX-Y
4000K - Ra90 - 10.2W - 998lm	1001.AA.27.940.XX-Y

DALI dim / Dim to Warm 1800-3000K (Driver 490.26.20 incl.)

DTW (DALI dim) - 9.4W - 732lm	1001.AA.26.dtw.XX-Y
-------------------------------	---------------------

Mains dim / Dim to Warm 1800-3000K (Driver 497.27.20 incl.)

DTW (mains dim) - 9.4W - 732lm	1001.AA.27.dtw.XX-Y
--------------------------------	---------------------


Trapezium springs: 0000.00.00.000.00-**T**
Boobytrap springs: 0000.00.00.000.00-**B**



TRAPEZIUM SPRINGS



BOOBYTRAP SPRINGS

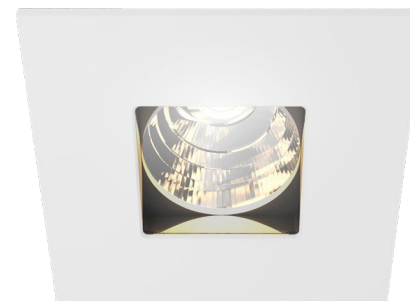

Titan Fix Square

Anti-glare

PRICES INCL. DRIVERS

Non dim (Driver 490.24.16 incl.)

2700K - Ra90 - 10.2W - 937lm	1000.AA.24.927.XX-Y
3000K - Ra90 - 10.2W - 984lm	1000.AA.24.930.XX-Y
4000K - Ra90 - 10.2W - 998lm	1000.AA.24.940.XX-Y

1-10V dim & Push dim (Driver 490.25.20 incl.)

2700K - Ra90 - 10.2W - 937lm	1000.AA.25.927.XX-Y
3000K - Ra90 - 10.2W - 984lm	1000.AA.25.930.XX-Y
4000K - Ra90 - 10.2W - 998lm	1000.AA.25.940.XX-Y

DALI dim (Driver 490.26.20 incl.)

2700K - Ra90 - 10.2W - 937lm	1000.AA.26.927.XX-Y
3000K - Ra90 - 10.2W - 984lm	1000.AA.26.930.XX-Y
4000K - Ra90 - 10.2W - 998lm	1000.AA.26.940.XX-Y

Mains dim (Driver 490.27.20 incl.)

2700K - Ra90 - 10.2W - 937lm	1000.AA.27.927.XX-Y
3000K - Ra90 - 10.2W - 984lm	1000.AA.27.930.XX-Y
4000K - Ra90 - 10.2W - 998lm	1000.AA.27.940.XX-Y

DALI dim / Dim to Warm 1800-3000K (Driver 490.26.20 incl.)

DTW (DALI dim) - 9.4W - 732lm	1000.AA.26.dtw.XX-Y
-------------------------------	---------------------

Mains dim / Dim to Warm 1800-3000K (Driver 497.27.20 incl.)

DTW (mains dim) - 9.4W - 732lm	1000.AA.27.dtw.XX-Y
--------------------------------	---------------------

28° Reflector: 0000.28.00.000.00-0
40° Reflector: 0000.40.00.000.00-0

Available colors: 0000.00.00.000.XX-0
Other RAL colors on request




01
White Matt Text.
Standard



18
Grey Matt Text.
Standard



07
Anthracite Matt Text.
Standard



03
Black Matt Text.
Standard



25
Smoked Brown Text.
Standard



16
Gold Matt
Standard