

LIGHT SHOOTER HP WALL-WASHER NO TRIM DIMMABLE

Number of heads	1
Mounting	Ceiling recessed
Lamps description	Power LED 11W 910 lm 2700K CRI 90
Luminaire luminous flux	Extreme Cut-off. See reference number
Voltage (V)	220/240
Environment	Indoor
Notes	LED: All the models include an accessory for IP54. Pre-installation frame included in No Trim versions.

OPTICAL


Aiming	Fixed
Light distribution symmetry	Asymmetric
Beam angle	26°

ELECTRICAL

Transformer availability	Included
Transformer mounting	Remote
Transformer type	Electronic, Electronic dimmable, Electronic dimmable I-10V, Electronic dimmable dali
Emergency	Without
Insulation class	Class II

PHYSICAL

Cutout diameter (mm)	105
Recessed depth (mm)	160
Construction material	Aluminium
Weight (kg)	0,45

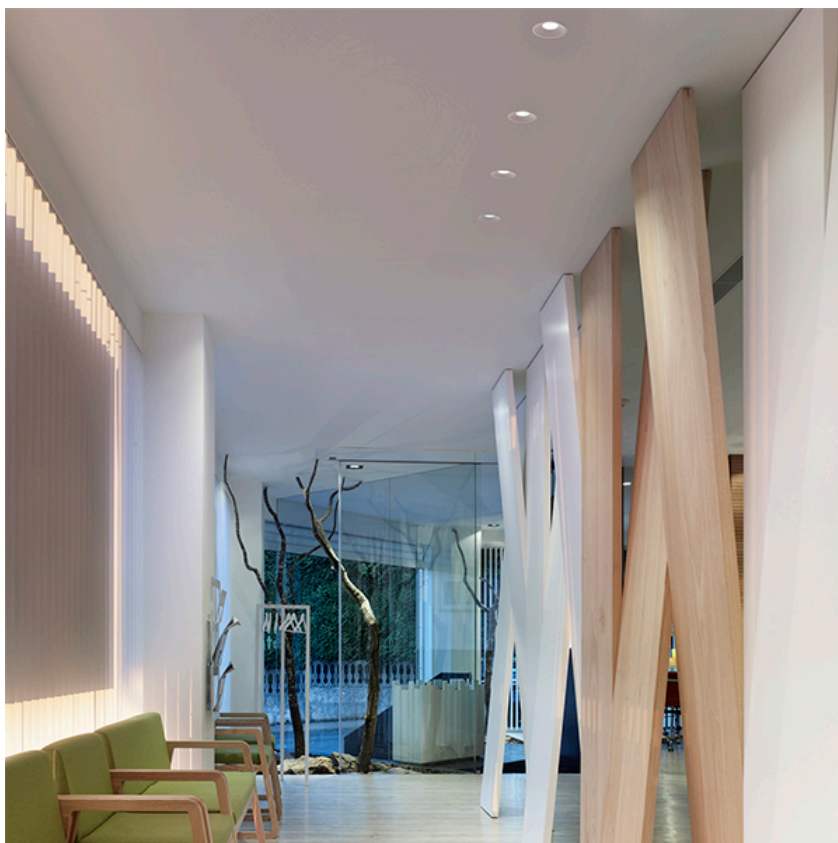


Light Shooter HP Wall-Washer No Trim Dimmable



designed by FLOS Architectural

High-performance embedded light fixture for LED light source. Remote 220-240V power supply included.

- 03.6579.40.DA - 529lm White
- 03.6579.14.DA - 529lm Black

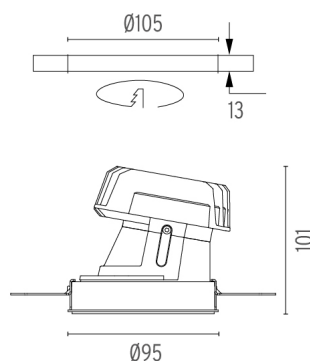

CERTIFICATIONS

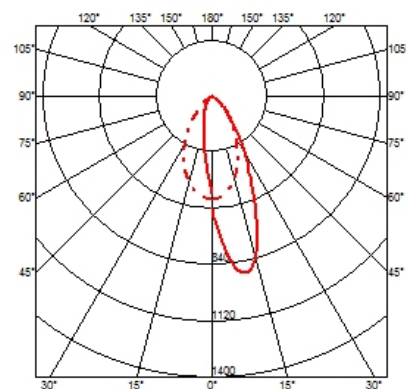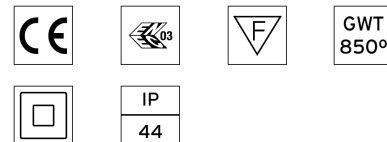

Light Shooter HP Wall-Washer No Trim Dimmable . Accessories

Optical



08.8041.68

Elliptical light distribution lens

Elliptical light distribution lens in 4mm thick tempered glass.



08.8412.14

Honeycomb

"Honeycomb" anti-glare grid made of aluminium cells.



Light Shooter HP Wall-Washer No Trim Dimmable

designed by FLOS Architectural

High-performance embedded light fixture for LED light source. Remote 220-240V power supply included.

03.6579.40.DA - 529lm White

03.6579.14.DA - 529lm Black

Light Shooter HP Wall-Washer No Trim Dimmable . Lamps



Power LED

Lamp category:



LED

Socket:

Special base

Lamp type:

Power LED

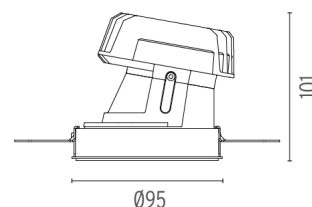

CERTIFICATIONS



GWT
850°



IP
44

