

SPOT 150 ON BOARD DIMMER

Number of heads	1
Mounting	Track mounting
Lamps description	LED Array 22,5W 2000 lm 2700K CRI 90
Luminaire luminous flux	See reference number
Voltage (V)	48
Environment	Indoor
Notes	Screening crosspiece, lenses and honeycomb directly installable on the head of the luminaire without needing any fastening accessory. Installation compatible with honeycomb + lense at the same time.



OPTICAL

Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	16° Spot

ELECTRICAL




Transformer availability	Separate item
Transformer mounting	Remote
Transformer type	Electronic dimmable
Emergency	Without
Insulation class	Class III


PHYSICAL

Spot diameter (mm)	57
Construction material	Aluminium
Weight (kg)	0,30


Spot 150 On Board Dimmer designed by FLOS Architectural

<div>Accent lighting LED module to be installed in The Tracking Magnet/ Infra-Structure System.</div>

	03.8072.40 - 1770lm	White
	03.8072.05 - 1770lm	Chrome
	03.8072.14 - 1770lm	Black



CERTIFICATIONS

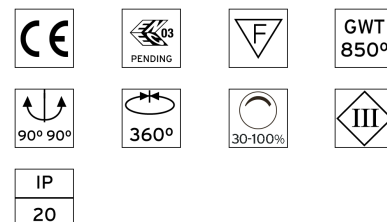

Spot 150 On Board Dimmer . Accessories

Optical



● 08.8429.00

Screening Crosspiece



○ 08.8431.00

Elliptical Lens



○ 08.8432.00

Flood Lens



● 08.8428.00

Honeycomb



● 08.0526.00


Snoot Shielding Cone



Spot 150 On Board Dimmer
designed by FLOS Architectural

<div>Accent lighting LED module to be installed in The Tracking Magnet/ Infra-Structure System.</div>

- 03.8072.40 - 1770lm White
- 03.8072.05 - 1770lm Chrome
- 03.8072.14 - 1770lm Black



CERTIFICATIONS



Spot 150 On Board Dimmer . Lamps



LED Array

Lamp category:

LED

Socket:

Special base

Lamp type:


LED Array



Spot 150 On Board Dimmer
designed by FLOS Architectural

<div>Accent lighting LED module to be installed in The Tracking Magnet/ Infra-Structure System.</div>

- 03.8072.40 - 1770lm White
- 03.8072.05 - 1770lm Chrome
- 03.8072.14 - 1770lm Black



CERTIFICATIONS

