

UT DOWNLIGHT TRIM Ø86 NON DIMMABLE

Number of heads	1
Mounting	Ceiling recessed
Lamps description	LED Array High Performances 27W 2767 lm 4000K CRI 90
Luminaire luminous flux	See reference number
Voltage (V)	220/240
Environment	Indoor

OPTICAL

Reflector finish	Aluminum
Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	37° Flood

ELECTRICAL

Transformer availability	Included
Transformer mounting	Remote
Transformer type	Electronic
Emergency	Without
Insulation class	Class II

PHYSICAL



Cutout diameter (mm)	120
Spot diameter (mm)	86
Construction material	Aluminium
Weight (kg)	1,36




UT Downlight Trim Ø86 Non Dimmable
designed by FLOS Architectural

Recessed luminaire with LED light source. 220-240V, 50-60Hz remote power supply included.<nextline>

- 09.4918.30A - 1768lm White
- 09.4918.14A - 1768lm Black

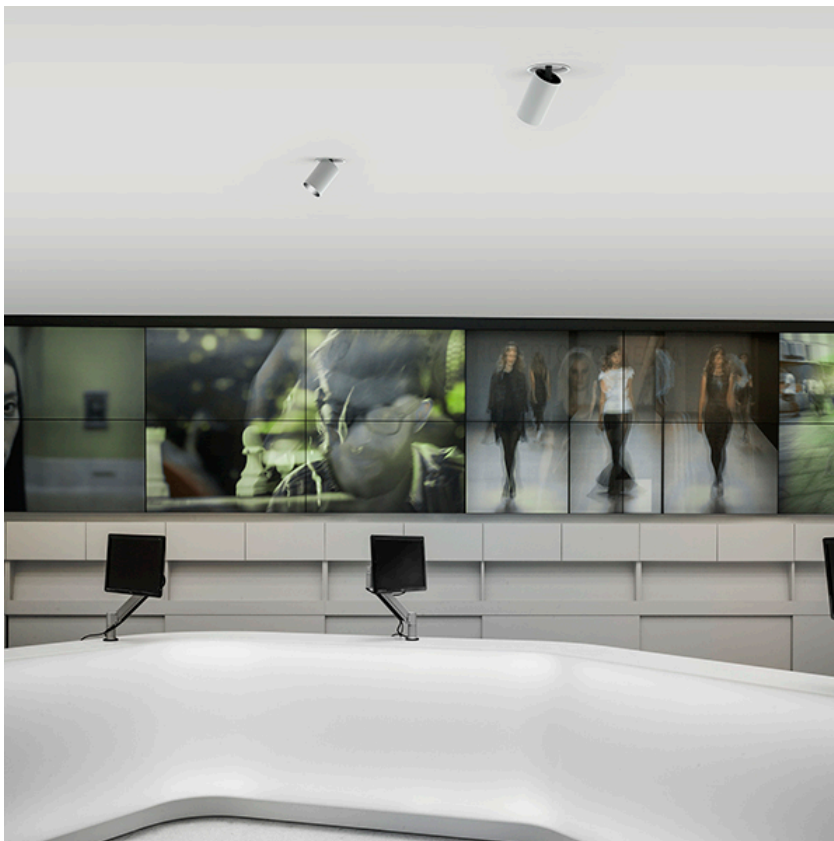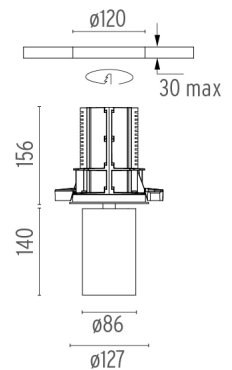

CERTIFICATIONS

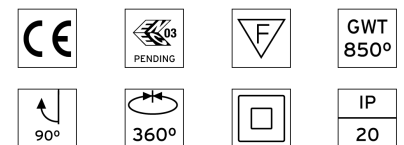

UT Downlight Trim Ø86 Non Dimmable . Accessories

Optical



○ 08.8163.68

Elliptical lens

Elliptical light distribution lens in 4 mm thick tempered glass.



○ 08.8175.68

Flood lens

Flood lens made in press glass.



● 08.8495.14

Honeycomb

"Honeycomb" anti-glare screen: in thin, black-painted aluminium sheets.



● 08.8410.00

Holding ring

Holding ring



● 08.8411.00

Screening crosspiece




UT Downlight Trim Ø86 Non Dimmable designed by FLOS Architectural

Recessed luminaire with LED light source. 220-240V, 50-60Hz remote power supply included.<nextline>

○ 09.4918.30A - 1768lm White

● 09.4918.14A - 1768lm Black

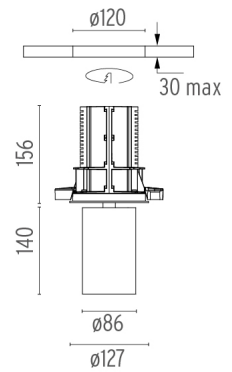

CERTIFICATIONS



UT Downlight Trim Ø86 Non Dimmable . Lamps



LED Array

Lamp category:

LED

Socket:

Special base

Lamp type:


LED Array



UT Downlight Trim Ø86 Non Dimmable
designed by FLOS Architectural

Recessed luminaire with LED light source. 220-240V, 50-60Hz remote power supply included.<nextline>

- 09.4918.30A - 1768lm White
- 09.4918.14A - 1768lm Black

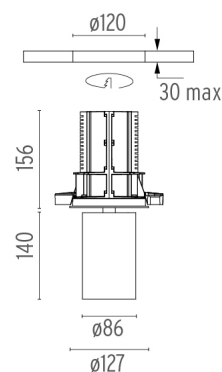

CERTIFICATIONS

