

CASTING T 150

Mounting	Ground
Lamps description	Power Led: 21W - 2x1080 lm ≠ FIXT 2x565 lm - 2700K/CRI 80 - 220-240V
Environment	Outdoor
Notes	We recommend using a connection system with a degree of protection greater than or equal to the degree of protection of the luminaire.
Technical description	The body of the versions C and T is made of extruded aluminum, base and diffuser in die-cast aluminum EN AB-47100 with a low copper content. High-resistance coating: after a sandblasting treatment of all components to make the surface porous and ensure a greater adhesion of the paint, the external coating is applied with a double layer with epoxy powders according to the QUALICOAT standard. The first layer of epoxy powder gives chemical and mechanical resistance, the second finishing layer of polyester powder ensures resistance to UV rays and atmospheric agents. The painted surfaces are treated with alkaline and acidic washes, then rinsed with demineralized water, subjected to a chemical conversion treatment to protect against oxidation. A glass diffuser is glued to the heat sink of the product to ensure a watertight seal, micro-texturized to ensure homogeneous and uniform distribution of the light. The luminaire is provided with a segment of outgoing cable in neoprene. We recommend installation on a plinth of cement or on a flat surface.



Casting T 150

designed by Vincent Van Duysen

Collection of outdoor bollard lights with LED light source. 220/240V power supply integrated. Version 110V upon request.

● FI270001	White
● FI270006	Grey
● FI270033	Anthracite
● FI270030	Black
● FI270018	Deep brown


ELECTRICAL

Transformer type	Electronic
Transformer availability	Included
Transformer mounting	Integral
Emergency	Without
Voltage (V)	220/240



PHYSICAL

IK rating	06
Aiming	Fixed
Weight (kg)	3,50
Number of heads	1

DIMENSIONS



CERTIFICATIONS

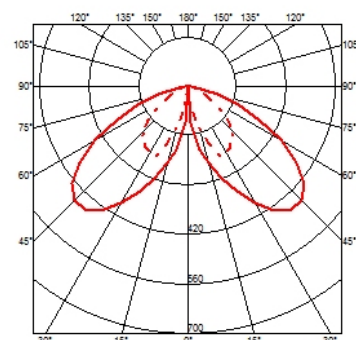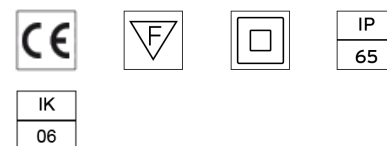




Casting T 150

designed by Vincent Van Duysen

Collection of outdoor bollard lights with LED light source. 220/240V power supply integrated. Version 110V upon request.

- F1270001 White
- F1270006 Grey
- F1270033 Anthracite
- F1270030 Black
- F1270018 Deep brown

DIMENSIONS



CERTIFICATIONS



Casting T 150 .Accessories


Electrical



F1206000

3/4 way terminal block 3 poles IP68

7-12 mm cables

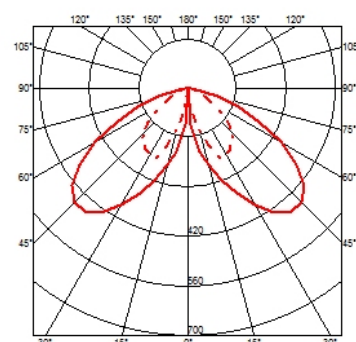

Casting T 150 . Accessories

Structural



○ F1207000

Base plate with bolt




Casting T 150

designed by Vincent Van Duysen


Collection of outdoor bollard lights with LED light source. 220/240V power supply integrated. Version 110V upon request.

- F1270001 White
- F1270006 Grey
- F1270033 Anthracite
- F1270030 Black
- F1270018 Deep brown

DIMENSIONS



CERTIFICATIONS

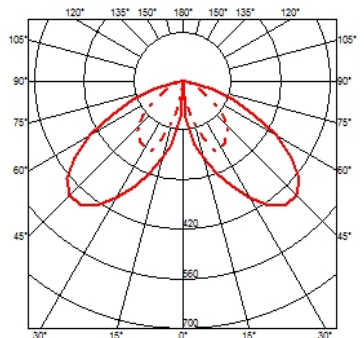

Casting T 150 . Lamps



Power LED

Lamp category:
LED

Socket:
Special base

Lamp type:
Power LED