

CASTING T 150

Mounting	Ground
Lamps description	Power Led: 21W - 2x1260 lm ≠ FIXT 2x660 lm - 4000K/CRI 80 - 220-240V
Environment	Outdoor
Notes	We recommend using a connection system with a degree of protection greater than or equal to the degree of protection of the luminaire.
Technical description	The body of the versions C and T is made of extruded aluminum, base and diffuser in die-cast aluminum EN AB-47100 with a low copper content. High-resistance coating: after a sandblasting treatment of all components to make the surface porous and ensure a greater adhesion of the paint, the external coating is applied with a double layer with epoxy powders according to the QUALICOAT standard. The first layer of epoxy powder gives chemical and mechanical resistance, the second finishing layer of polyester powder ensures resistance to UV rays and atmospheric agents. The painted surfaces are treated with alkaline and acidic washes, then rinsed with demineralized water, subjected to a chemical conversion treatment to protect against oxidation. A glass diffuser is glued to the heat sink of the product to ensure a watertight seal, micro-texturized to ensure homogeneous and uniform distribution of the light. The luminaire is provided with a segment of outgoing cable in neoprene. We recommend installation on a plinth of cement or on a flat surface.



Casting T 150

designed by Vincent Van Duysen

Collection of outdoor bollard lights with LED light source. 220/240V power supply integrated. Version 110V upon request.

● FI275001	White
● FI275006	Grey
● FI275033	Anthracite
● FI275030	Black
● FI275018	Deep brown


ELECTRICAL

Transformer type	Electronic
Transformer availability	Included
Transformer mounting	Integral
Emergency	Without
Voltage (V)	220/240


PHYSICAL

IK rating	06
Aiming	Fixed
Weight (kg)	4,50
Number of heads	1

DIMENSIONS



CERTIFICATIONS

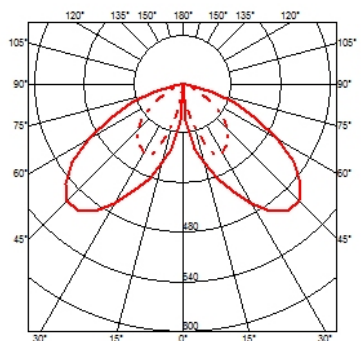




Casting T 150

designed by Vincent Van Duysen



Collection of outdoor bollard lights with LED light source. 220/240V power supply integrated. Version 110V upon request.

- F1275001 White
- F1275006 Grey
- F1275033 Anthracite
- F1275030 Black
- F1275018 Deep brown

DIMENSIONS



CERTIFICATIONS

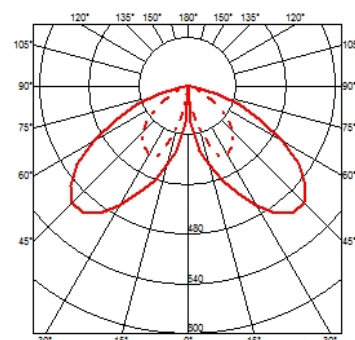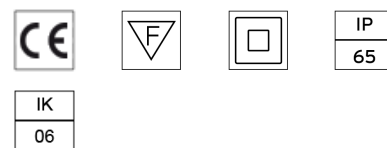

Casting T 150 .Accessories

Electrical



○ F1206000

3/4 way terminal block 3 poles IP68

7-12 mm cables

Casting T 150 . Accessories

Structural



○ F1207000

Base plate with bolt




Casting T 150

designed by Vincent Van Duysen


Collection of outdoor bollard lights with LED light source. 220/240V power supply integrated. Version 110V upon request.

- F1275001 White
- F1275006 Grey
- F1275033 Anthracite
- F1275030 Black
- F1275018 Deep brown

DIMENSIONS



CERTIFICATIONS

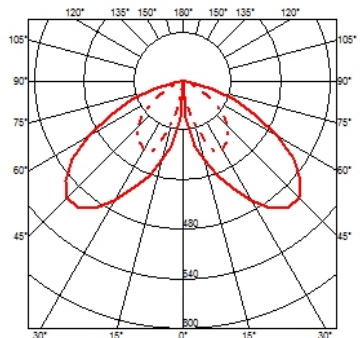

Casting T 150 . Lamps



Power LED

Lamp category:
LED

Socket:
Special base

Lamp type:
Power LED