


IN-FINITY 100 RECESSED NO TRIM 3000K MICRO-PRISMATIC DIFFUSER

Number of heads	1
Mounting	Recessed No Trim
Lamps description	Top LED 34,1W/m 3915 lm/m 3000K CRI 80
Luminaire luminous flux	See reference number
Voltage (V)	220/240
Environment	Indoor
Notes	Micro-Prismatic Diffuser: Highly efficient multilayer diffuser that, thanks to its unique micro-prismatic texture, provides a glare free UGR<19 light beam. / Emergency: Emergency Module available in all versions, length 1125 mm. In normal use, it uses the same power consumption as the standard In-Finity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps.



In-Finity 100 Recessed No Trim 3000K Micro-Prismatic Diffuser

designed by FLOS Architectural

LED modular system for recessed No Trim installation, including LED luminaires, aluminum installation profile and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.

OPTICAL

Aiming	Fixed
Light distribution symmetry	Symmetric
Beam angle	77°



ELECTRICAL

Transformer availability	Included
Transformer mounting	Integral
Transformer type	Electronic
Emergency	Without
Insulation class	Class I



PHYSICAL

Recessed depth (mm)	135
Construction material	Aluminium

- N10N053U30 565mm - 1607lm White
- N10N083U30 845mm - 2410lm White
- N10N113U30 1125mm - 3214lm White
- N10N143U30 1405mm - 4017lm White
- N10N163U30 1690mm - 4821lm White
- N10N193U30 1970mm - 5624lm White
- N10N253U30 2530mm - 7231lm White
- N10N303U30 3095mm - 8838lm White
- N10NFC3U30 Flat Corner - 3214lm White
- N10NDC3U30 Dihedral Corner - 3214lm White
- N10NEM3U30 Emergency - 4017lm White



CERTIFICATIONS

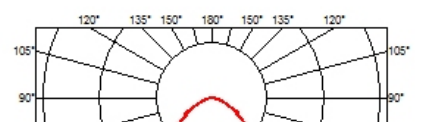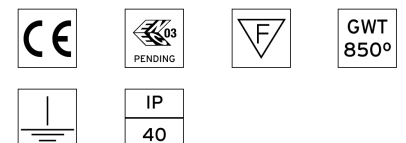

In-Finity 100 Recessed No Trim 3000K Micro-Prismatic Diffuser . Accessories

Structural



● 08.9054.40

Metal cover. Recessed No Trim. 100 mm

Metal cover for the different profiles. 2 unit kit.

In-Finity 100 Recessed No Trim 3000K Micro-Prismatic Diffuser . Lamps



Top LED

Lamp category:


LED

Socket:

Special base

Lamp type:



Top LED



In-Finity 100 Recessed No Trim 3000K Micro-Prismatic Diffuser designed by FLOS Architectural

LED modular system for recessed No Trim installation, including LED luminaires, aluminum installation profile and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.

- N10N053U30 565mm - 1607lm White
- N10N083U30 845mm - 2410lm White
- N10N113U30 1125mm - 3214lm White
- N10N143U30 1405mm - 4017lm White
- N10N163U30 1690mm - 4821lm White
- N10N193U30 1970mm - 5624lm White
- N10N253U30 2530mm - 7231lm White
- N10N303U30 3095mm - 8838lm White
- N10NFC3U30 Flat Corner - 3214lm White
- N10NDC3U30 Dihedral Corner - 3214lm White
- N10NEM3U30 Emergency - 4017lm White



CERTIFICATIONS

