

RIGA OPAL

RIGA is a product family with a selection of flexible LED strips for outdoor use, particularly suitable for decorative lighting. Riga is composed by a 24V LED strip embedded in a white PVC profile and encapsulated in a opal polyurethane resin, extremely resistable to any weather condition and with an excellent stability against UV rays. It emits light either from the front or the side dependent on the curvature of LED strip.

Riga is available in various standard lengths.

The installation can be done with clips (included).



1M | 3000K - FRONT LIGHT

LAMPING

Source	Flexible linear LED
Total power	9,6W
Emission	Diffused orientable
Tension	24VDC
Color temperature	3000K
Luminous flux	510lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x100cm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,39 kg

Codes

MRIG0910G35WFL

Structure

white


PACKAGE

Package 01 Dimension: 42x42x4,5 cm / Gross weight: 1,47 kg

Certificazioni



RIGA OPAL

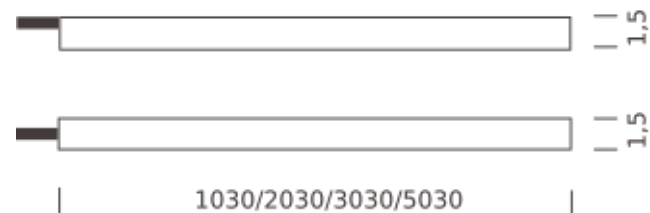

BRACKETS (included)



1M | 3000K - SIDE LIGHT

LAMPING

Source	Flexible linear LED
Total power	9,6W
Emission	Diffused orientable
Tension	24VDC
Color temperature	3000K
Luminous flux	510lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x100cm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,39 kg

Codes

MRIG0910G35WSL


Structure

white

PACKAGE

Package 01 Dimension: 42x42x4,5 cm / Gross weight: 1,47 kg

Certificazioni

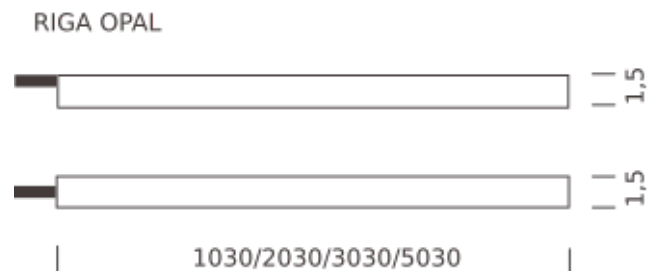

BRACKETS (included)



1M | 4000K - FRONT LIGHT

LAMPING

Source	Flexible linear LED
Total power	9,6W
Emission	Diffused orientable
Tension	24VDC
Color temperature	4000K
Luminous flux	600lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x100cm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,39 kg

Codes

MRIG0910G35NFL


Structure

white

PACKAGE

Package 01 Dimension: 42x42x4,5 cm / Gross weight: 1,47 kg

Certificazioni

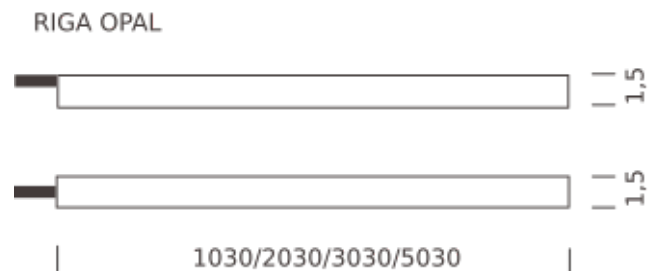

BRACKETS (included)



1M | 4000K - SIDE LIGHT

LAMPING

Source	Flexible linear LED
Total power	9,6W
Emission	Diffused orientable
Tension	24VDC
Color temperature	4000K
Luminous flux	600lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x100cm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,39 kg

Codes

MRIG0910G35NSL

Structure


white

PACKAGE

Package 01

Dimension: 42x42x4,5 cm / Gross weight: 1,47 kg

Certificazioni

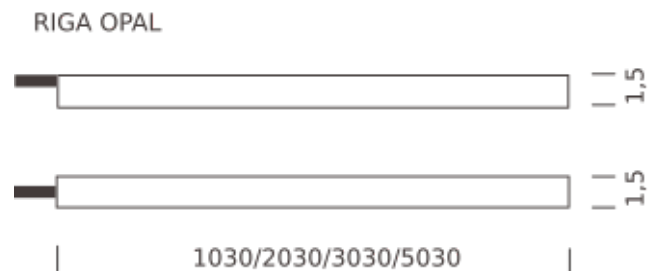

BRACKETS (included)



2M | 3000K - FRONT LIGHT

LAMPING

Source	Flexible linear LED
Total power	19,2W
Emission	Diffused orientable
Tension	24VDC
Color temperature	3000K
Luminous flux	1020lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x200cm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,86 kg

Codes

MRIG0920G35WFL


Structure

white

PACKAGE

Package 01 Dimension: 42x42x4,5 cm / Gross weight: 1,51 kg

Certificazioni

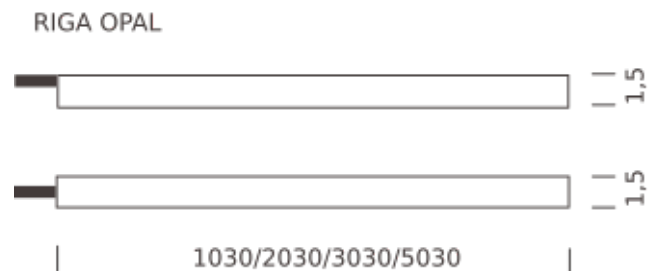

BRACKETS (included)



2M | 3000K - SIDE LIGHT

LAMPING

Source	Flexible linear LED
Total power	19,2W
Emission	Diffused orientable
Tension	24VDC
Color temperature	3000K
Luminous flux	1020lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x200cm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,86 kg

Codes

MRIG0920G35WSL

Structure

white


PACKAGE

Package 01 Dimension: 42x42x4,5 cm / Gross weight: 1,51 kg

Certificazioni



RIGA OPAL

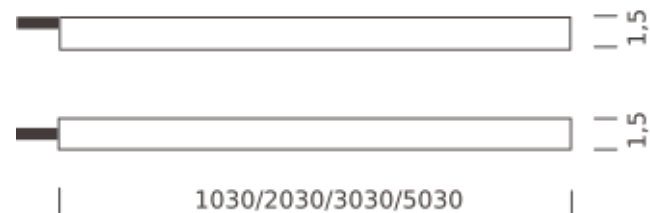

BRACKETS (included)



2M | 4000K - FRONT LIGHT

LAMPING

Source	Flexible linear LED
Total power	19,2W
Emission	Diffused orientable
Tension	24VDC
Color temperature	4000K
Luminous flux	1200lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x200cm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,86 kg

Codes

MRIG0920G35NFL


Structure

white

PACKAGE

Package 01 Dimension: 42x42x4,5 cm / Gross weight: 1,51 kg

Certificazioni

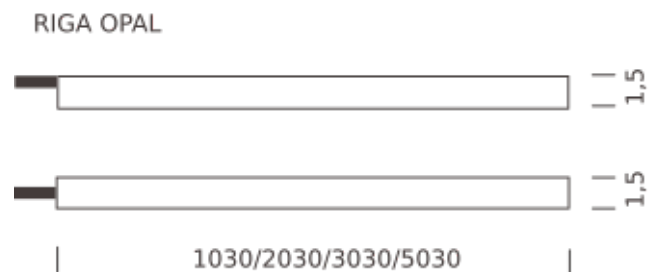

BRACKETS (included)



2M | 4000K - SIDE LIGHT

LAMPING

Source	Flexible linear LED
Total power	19,2W
Emission	Diffused orientable
Tension	24VDC
Color temperature	4000K
Luminous flux	1200lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x200cm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,86 kg

Codes

MRIG0920G35NSL


Structure

white

PACKAGE

Package 01 Dimension: 42x42x4,5 cm / Gross weight: 1,51 kg

Certificazioni

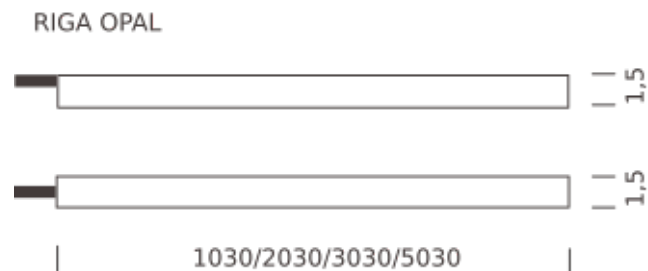

BRACKETS (included)



3M | 3000K - FRONT LIGHT

LAMPING

Source	Flexible linear LED
Total power	28,8W
Emission	Diffused orientable
Tension	24VDC
Color temperature	3000K
Luminous flux	1530lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x300cm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	1,3 kg

Codes

MRIG0930G35WFL


Structure

white

PACKAGE

Package 01 Dimension: 42x42x4,5 cm / Gross weight: 1,94 kg

Certificazioni

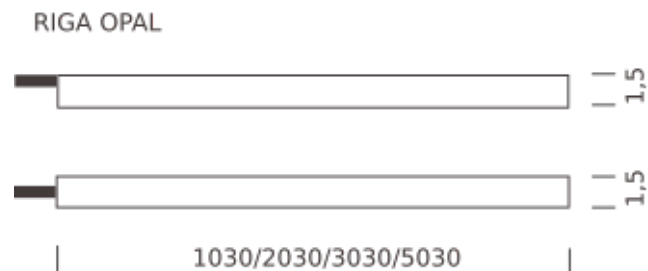

BRACKETS (included)



3M | 3000K - SIDE LIGHT

LAMPING

Source	Flexible linear LED
Total power	28,8W
Emission	Diffused orientable
Tension	24VDC
Color temperature	3000K
Luminous flux	1530lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x300cm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	1,3 kg

Codes

MRIG0930G35WSL

Structure


white

PACKAGE

Package 01

Dimension: 42x42x4,5 cm / Gross weight: 1,94 kg

Certificazioni

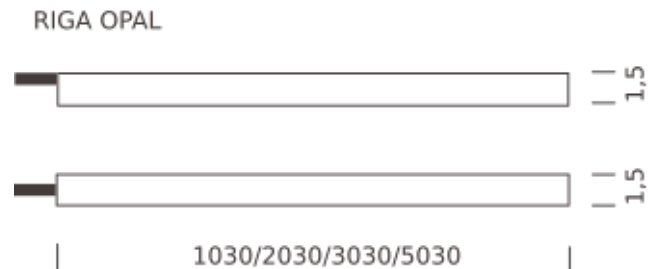

BRACKETS (included)



3M | 4000K - FRONT LIGHT

LAMPING

Source	Flexible linear LED
Total power	28,8W
Emission	Diffused orientable
Tension	24VDC
Color temperature	4000K
Luminous flux	1800lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x300cm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	1,3 kg

Codes

MRIG0930G35NFL


Structure

white

PACKAGE

Package 01 Dimension: 42x42x4,5 cm / Gross weight: 1,94 kg

Certificazioni

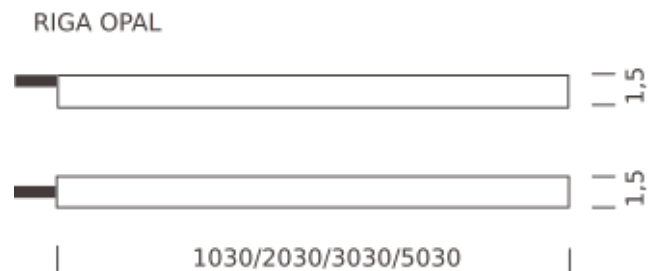

BRACKETS (included)



3M | 4000K - SIDE LIGHT

LAMPING

Source	Flexible linear LED
Total power	28,8W
Emission	Diffused orientable
Tension	24VDC
Color temperature	4000K
Luminous flux	1800lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x300cm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	1,3 kg

Codes

MRIG0930G35NSL

Structure


white

PACKAGE

Package 01

Dimension: 42x42x4,5 cm / Gross weight: 1,94 kg

Certificazioni

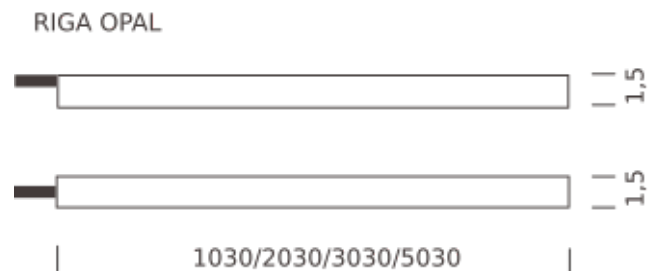

BRACKETS (included)



4M | 3000K - FRONT LIGHT

LAMPING

Source	Flexible linear LED
Total power	38,4W
Emission	Diffused orientable
Tension	24VDC
Color temperature	3000K
Luminous flux	2040lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x400cm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	1,78 kg

Codes

MRIG0940G35WFL


Structure

white

PACKAGE

Package 01 Dimension: 42x42x4,5 cm / Gross weight: 2,38 kg

Certificazioni

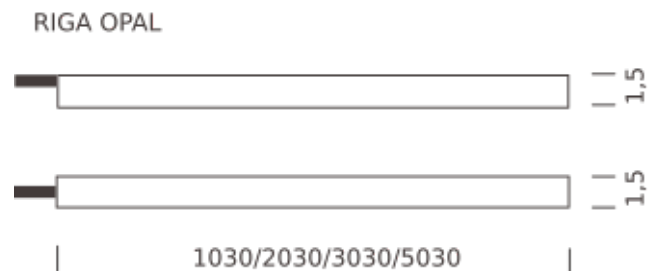

BRACKETS (included)



4M | 3000K - SIDE LIGHT

LAMPING

Source	Flexible linear LED
Total power	38,4W
Emission	Diffused orientable
Tension	24VDC
Color temperature	3000K
Luminous flux	2040lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x400cm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	1,78 kg

Codes

MRIG0940G35WSL

Structure

white


PACKAGE

Package 01 Dimension: 42x42x4,5 cm / Gross weight: 2,38 kg

Certificazioni



RIGA OPAL

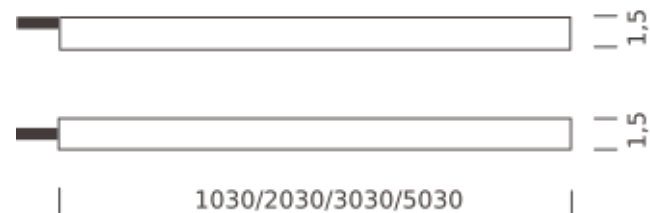

BRACKETS (included)



4M | 4000K - FRONT LIGHT

LAMPING

Source	Flexible linear LED
Total power	38,4W
Emission	Diffused orientable
Tension	24VDC
Color temperature	4000K
Luminous flux	2400lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x400cm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	1,78 kg

Codes

MRIG0940G35NFL


Structure

white

PACKAGE

Package 01 Dimension: 42x42x4,5 cm / Gross weight: 2,38 kg

Certificazioni

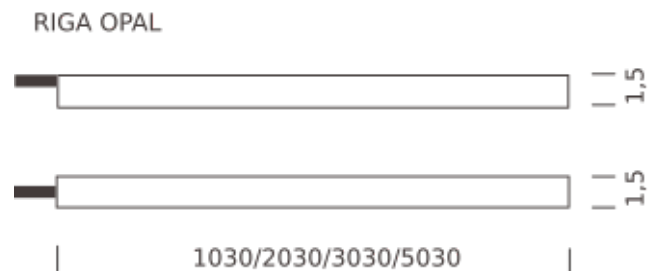

BRACKETS (included)



4M | 4000K - SIDE LIGHT

LAMPING

Source	Flexible linear LED
Total power	38,4W
Emission	Diffused orientable
Tension	24VDC
Color temperature	4000K
Luminous flux	2400lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x400cm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	1,78 kg

Codes

MRIG0940G35NSL

Structure

white


PACKAGE

Package 01 Dimension: 42x42x4,5 cm / Gross weight: 2,38 kg

Certificazioni



RIGA OPAL

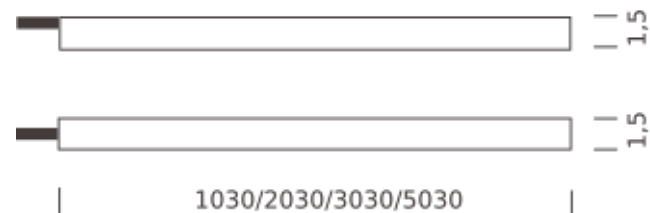

BRACKETS (included)



5M | 3000K - FRONT LIGHT

LAMPING

Source	Flexible linear LED
Total power	48W
Emission	Diffused orientable
Tension	24VDC
Color temperature	3000K
Luminous flux	2550lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x500cm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	2,16 kg

Codes

MRIG0950G35WFL


Structure

white

PACKAGE

Package 01 Dimension: 42x42x4,5 cm / Gross weight: 0,99 kg

Certificazioni

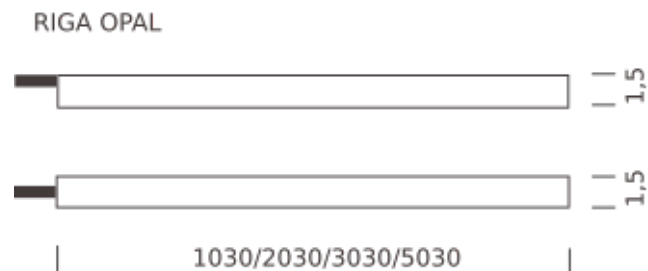

BRACKETS (included)



5M | 3000K - SIDE LIGHT

LAMPING

Source	Flexible linear LED
Total power	48W
Emission	Diffused orientable
Tension	24VDC
Color temperature	3000K
Luminous flux	2550lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x500cm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	2,16 kg

Codes

MRIG0950G35WSL

Structure

white


PACKAGE

Package 01 Dimension: 42x42x4,5 cm / Gross weight: 0,99 kg

Certificazioni



RIGA OPAL

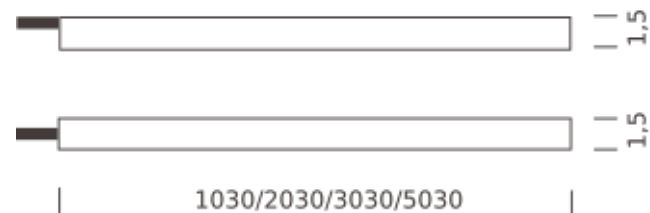

BRACKETS (included)



5M | 4000K - FRONT LIGHT

LAMPING

Source	Flexible linear LED
Total power	48W
Emission	Diffused orientable
Tension	24VDC
Color temperature	4000K
Luminous flux	3000lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x500cm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	2,16 kg

Codes

MRIG0950G35NFL


Structure

white

PACKAGE

Package 01 Dimension: 42x42x4,5 cm / Gross weight: 0,99 kg

Certificazioni

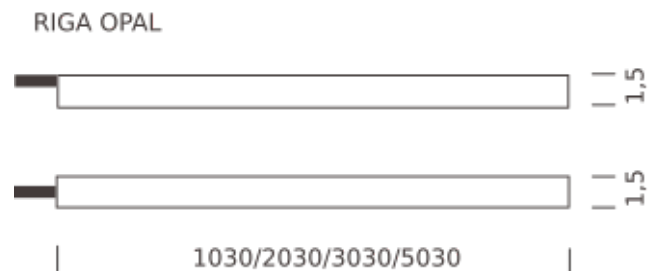

BRACKETS (included)



5M | 4000K - SIDE LIGHT

LAMPING

Source	Flexible linear LED
Total power	48W
Emission	Diffused orientable
Tension	24VDC
Color temperature	4000K
Luminous flux	3000lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x500cm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	2,16 kg

Codes

MRIG0950G35NSL

Structure

white


PACKAGE

Package 01 Dimension: 42x42x4,5 cm / Gross weight: 2,38 kg

Certificazioni



RIGA OPAL

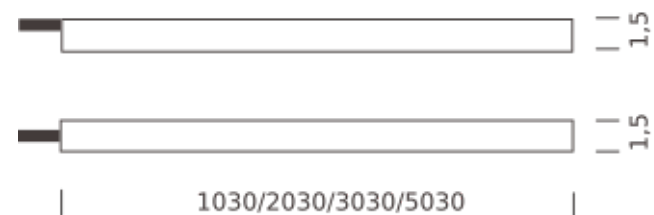

BRACKETS (included)

