

542005

Product Sheet

ares

THE OUTDOOR BY FLOS

ARES s.r.l - Socio Unico

v.le dell'Artigianato n.24 - 20881 Bernareggio - MB (Italy)

www.aresill.net - flos.outdoor@flos.com

Eclipse


Slim round luminaire for installation on wall - surface mounted. Configuration: die-cast aluminium structure, EN AB-47100 alloy (low copper content), stainless steel bracket and transparent polycarbonate emitting unit. Double layer coating for high resistance to corrosion: the aluminium components are painted with a double coat using powders that are compliant with QUALICOAT standards: a first layer of epoxy powder (with excellent chemical and mechanical resistance) and a second finishing layer of polyester powder (resistant to UV rays and atmospheric agents). The entire painting process of the aluminium fitting starts from components that have been sandblasted in advance to make the surface more porous and increase the adherence of the paint. Ares effects alkaline and acid washing to clean the surfaces completely, then rinses with demineralised water to remove any residue particles, subsequently a chemical conversion treatment is done to protect against rusting. Protection rating: IP65 In compliance with EN60598-1 standards Class of insulation: II; 24V version: III Installation: the luminaire is equipped with a piece of neoprene cable (approx. 200mm) for an easy-to-make connection. Direct screwing on surface through the stainless steel bracket. We recommend the use of a connection system with a protection degree greater than or equal to the protection degree of the luminaire.

IP65   

Available Colors for this Version




Eclipse Mid-Power LED

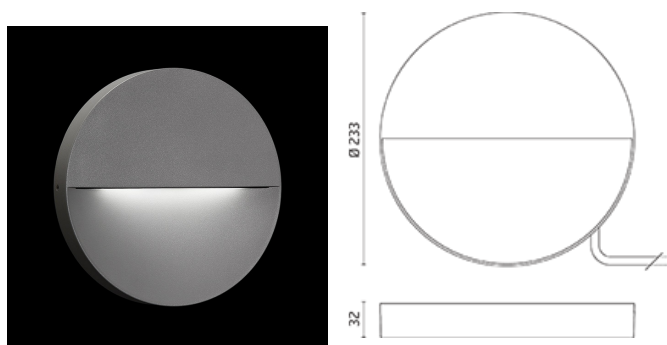

Warnings

Wall

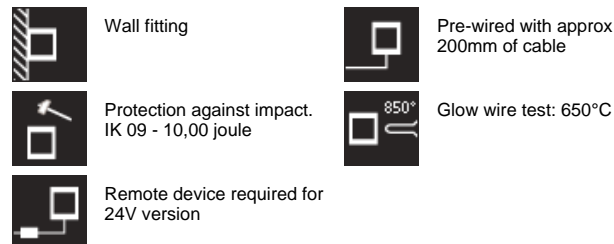

Product Code Details

542005

Light Source



NATURAL WHITE 4000K MID-POWER LEDs 6W/24Vdc

Total power 7,5W

LED lm 835 ÷ OUTPUT lm 437

CRI >80

Remote electronic power supply to be ordered

Dimmable on request, acc.: 144,176

Light Flux, Placement



Accessories



Code: 87
Supported n. of lamps: 1
Power supply
10W/110÷240V - 24Vdc
IP20 CLASS II SELV.



Code: 175
Supported n. of lamps: 1
Power supply
10W/110÷240V - 24Vdc
IP67 CLASS II SELV.



Code: 144
Supported n. of lamps: 2
Power supply
17W/110÷240V - 24Vdc
(15W@110V) IP20 CLASS II SELV.



Code: 176
Supported n. of lamps: 2
Power supply
17W/110÷240V - 24Vdc
(15W@110V) IP67 CLASS II SELV.



Code: 147
Supported n. of lamps: 2
Power supply
20W/220÷240V - 24Vdc
IP67 CLASS II SELV.



Code: 155
Supported n. of lamps: 6
Power supply
50W/120÷240V - 24Vdc
IP67 CLASS II SELV.



Code: 110
Supported n. of lamps: 9
Power supply
70W/220÷240V - 24Vdc
IP67 CLASS II SELV EQ.



Code: 156
Supported n. of lamps: 12
Power supply
100W /120÷240V - 24Vdc
IP67 CLASS II SELV.