# 1186721

**Product Sheet** 



IP65 ♥ ⊕ C€

1. white

3. anthracite

18. deep brown


ARES s.r.I - Socio Unico v.le dell'Artigianato n.24 - 20881 Bernareggio - MB (Italy) www.aresill.net - flos.outdoor@flos.com

Available Colors for this Version

### Emma ø150

Luminaire for installation on wall - surface mounted. Configuration: die-cast aluminium fixing base and frames, EN AB-47100 alloy (low copper content), extruded aluminium body. Glass diffuser: transparent. Double layer coating for high resistance to corrosion: the aluminium components are painted with a double coat using powders that are compliant with QUALICOAT standards: a first layer of epoxy powder (with excellent chemical and mechanical resistance) and a second finishing layer of polyester powder (resistant to UV rays and atmospheric agents). The entire painting process of the aluminium fitting starts from components that have been sandblasted in advance to make the surface more porous and increase the adherence of the paint. Ares effects alkaline and acid washing to clean the surfaces completely, then rinses with demineralised water to remove any residue particles, subsequently a chemical conversion treatment is done to protect against rusting. Protection rating: IP65. In compliance with EN 60598-1 standards. Class of insultation: I. Installation: wiring through two cable holders (8mm<0-12mm cables). Outdoor use requires suitable flexible cables assuring the watertightness of the cable holder. A quick clamp placed in the wiring unit allows an easy connection and disconnection for installation or maintenance.

### Emma 150 / Unidirectional - Medium Beam 40°

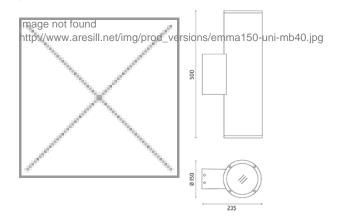

## Warnings



6. grey

4. black

#### **Product Code Details**

1186721

Light Source



HIT-TC-CE 35W G8.5



#### Light Flux, Placement





This product has no accessories