

# 930100

Product Sheet

**ares**  
THE OUTDOOR BY FLOS

ARES s.r.l - Socio Unico  
v.le dell'Artigianato n.24 - 20881 Bernareggio - MB (Italy)  
www.aresill.net - flos.outdoor@flos.com

## Mini Silvia


Outdoor luminaire for installation on wall, ceiling and floor. Configuration: die-cast aluminium structure EN AB-47100 alloy (low copper content), borosilicate transparent or sandblasted glass, moulded silicone gaskets. Double layer coating for high resistance to corrosion: The aluminium components are painted with a double coat using powders which are compliant with QUALICOAT standards: a first layer of epoxy powder (with excellent chemical and mechanical resistance) and a second finishing layer of polyester powder (resistant to UV rays and atmospheric agents). The entire painting process of the aluminium fitting starts from components which have been sand-blasted in advance to make the surface more porous and increase the adherence of the paint. Ares effects alkaline and acid washing to clean the surfaces completely, then rinses with demineralised water to remove any residue particles, subsequently a chemical conversion treatment is done to protect against rusting. Protection Rating: IP65. In compliance with EN 60598-1 standards. Class of insulation: I. Installation: wiring through M16x1,5 cable gland (4,5<ø<10mm cables) placed under the head of the luminaire. Outdoor use requires suitable flexible cables assuring the watertightness of the cable gland. We recommend installation on a concrete basement or surface, directly with bolts or through the dedicated fixing plate (to be ordered separately).

IP65   CE

### Available Colors for this Version



### MiniSilvia / Sandblasted Glass - 360° Emission

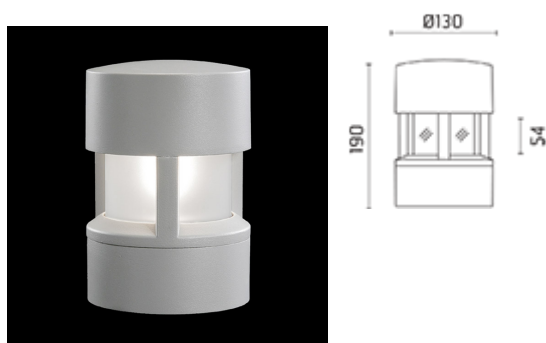

### Warnings

#### Bollard



Bollard light



The fitting is equipped with 1 cable input



Ceiling fitting



Protection against impact. IK 07 - 02,00 joule

#### Ceiling



Ceiling fitting



Protection against impact. IK 07 - 02,00 joule



The fitting is equipped with 1 cable input

#### Wall



Wall fitting



The fitting is equipped with 1 cable input



Ceiling fitting



Protection against impact. IK 07 - 02,00 joule

### Product Code Details

# 930100

Light Source



QT 32 60W E27



### Light Flux, Placement



Accessories

---

This product has no accessories