

Last information update: June 2018

**Wall-mounted, Transversal Asymmetric Optic, Warm LED, 220-240V ac****Product code**

AKS4

**Technical description**

Direct light luminaire, designed to use monochrome LED lamps. It consists of a body, an optical assembly and a base for fixing it to the wall. Optical assembly and die-cast aluminium glass-holder frame. 5mm thick tempered sodium-calcium closing glass with black serigraphy. Transparent glass with black serigraphy for high performance direct and indirect lighting. Body and optical assembly subjected to a multi-step, pre-treatment process, in which the main phases are degreasing, fluorozirconation (a protective surface film) and sealing (with a nano-structured silane layer). The following painting stage consists of a primer and a liquid acrylic paint, cured at 150°C, with a high level of weather and UV ray resistance. Transversal Asymmetric Optic (AT) with high performance Opti-smart reflectors in superpure aluminium coated with silver deposits offering uniform light distribution. Both the LED unit and the ballast may be substituted. Optical assembly complete with electronic control gear and output power cable. IP68 connectors to be ordered separately are required for the electrical connection. All the screws used are made of A2 stainless steel.

**Installation**

Wall-mounted with screw anchors not supplied with the product.

**Dimension (mm)**

290x126x50

**Colour**

Grey (15)

**Weight (Kg)**

2.5


**Mounting**

wall surface

**Wiring**

Product complete with 220÷240V ac electronic control gear.

Complies with EN60598-1 and pertinent regulations

**Product configuration: AKS4****Product characteristics**

Total lighting output [Lm]: 2044  
 Total power [W]: 26.1  
 Luminous efficacy [Lm/W]: 78.3  
 Life Time: 100,000h - L90 - B10 (Ta 25°C)  
 Ambient temperature range: from -20°C to +35°C. (\*)

Total luminous flux at or above an angle of 90° [Lm]: 0  
 Emergency luminous flux [Lm]: /  
 Voltage [V]: 230  
 Life Time: 100,000h - L80 - B10 (Ta 40°C)  
 Number of optical assemblies: 1


\* Preliminary data

**Optical assembly Characteristics Type 1**


Light Output Ratio (L.O.R.) [%]: 73  
 Lamp code: LED  
 ZVEI Code: LED  
 Nominal power [W]: 24  
 Nominal luminous [Lm]: 2800  
 Lamp maximum intensity [cd]: /  
 Beam angle [°]: /

Number of lamps for optical assembly: 1  
 Socket: /  
 Ballast losses [W]: 2.1  
 Colour temperature [K]: 3000  
 CRI: 80  
 Wavelength [Nm]: /  
 MacAdam Step: 3

Polar

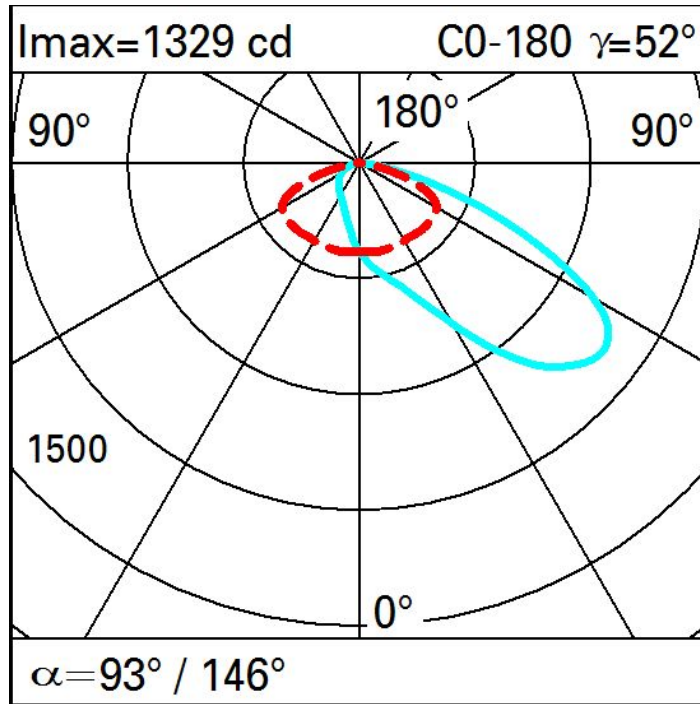

Isolux

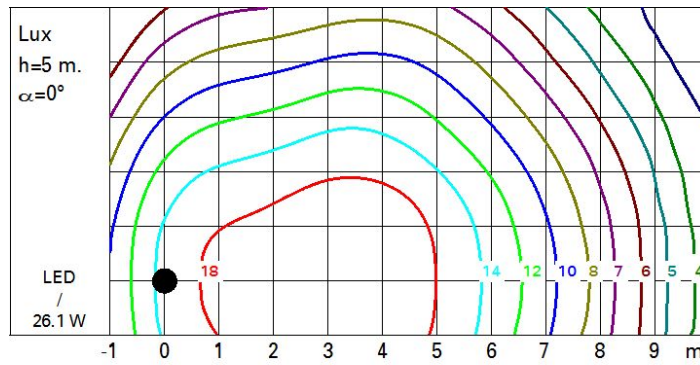

Illuminances

