

Last information update: May 2018

**Wall-mounted system with street optic.****Product code**
E890**Technical description**

Outdoor luminaire with a street optic (ST1.C), designed to use LED lamps, supplied with a painted steel wall-mounted arm L=561mm. The optical assembly is made of EN1706AC 46100LF aluminium alloy and subjected to a multi-step, pre-treatment process, in which the main phases are degreasing, fluorozirconation (a protective surface film) and sealing (with a nano-structured silane layer). The painting stage consists of a primer and a liquid acrylic paint, cured at 150 °C, with a high level of weather and UV ray resistance. Diffusor made of shockproof, UV-stabilised injection moulded polycarbonate. Complete with circuit having monochrome LEDs and polymer optic multilayer lenses. Changeable driver and LEDs. Electronic selv driver with automatic internal temperature control system. All external screws are made of stainless steel.

Installation

Wall-mounted installation.

Dimension (mm)

Ø323

Colour

Grey (15)

Weight (Kg)

6.5

Mounting

wall arm|wall surface


Wiring

The product is supplied wired and with an outlet cable.

Notes

Overvoltage protection: 6KV Common Mode, 7KV Differential Mode

Complies with EN60598-1 and pertinent regulations

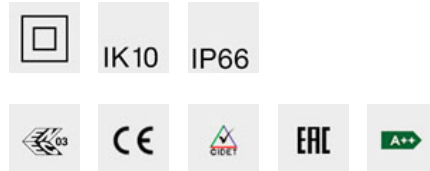**Product configuration: E890****Product characteristics**

Total lighting output [Lm]: 830
 Total power [W]: 10.7
 Luminous efficacy [Lm/W]: 77.6
 Life Time: 100,000h - L90 - B10 (Ta 25°C)
 Life Time: 100,000h - L90 - B10 (Ta 40°C)
 Ambient temperature range: from -20°C to +35°C. (*)

Total luminous flux at or above an angle of 90° [Lm]: 5
 Emergency luminous flux [Lm]: /
 Voltage [V]: -
 Life Time: 100,000h - L80 - B10 (Ta 25°C)
 Life Time: 100,000h - L80 - B10 (Ta 40°C)
 Number of optical assemblies: 1


* Preliminary data

Optical assembly Characteristics Type 1


Light Output Ratio (L.O.R.) [%]: 100
 Lamp code: LED
 ZVEI Code: LED
 Nominal power [W]: /
 Nominal luminous [Lm]: /
 Lamp maximum intensity [cd]: /
 Beam angle [°]: /

Number of lamps for optical assembly: 1
 Socket: /
 Ballast losses [W]: 2.3
 Colour temperature [K]: 3000
 CRI: 70
 Wavelength [Nm]: /
 MacAdam Step: 5

Polar

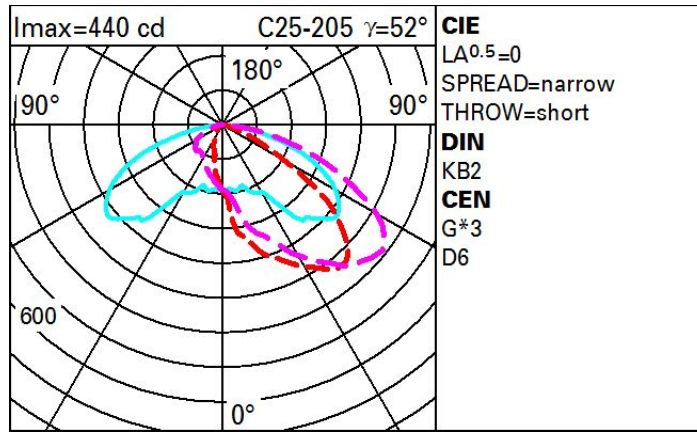

Isolux

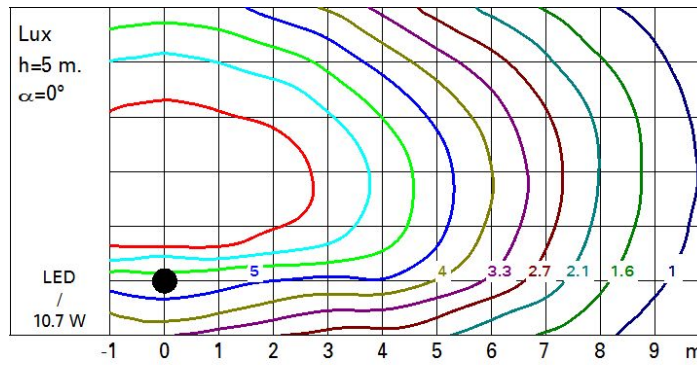

Utilisation factors

