



Last information update: May 2018

**recessed luminaire Ø 110 - warm white passive dissipation LED - integrated DALI control gear - medium****Product code**

MN63

Technical description

recessed adjustable removable luminaire for LED lamp with passive heat dissipation system. Structure with die-cast aluminium frame and main body; shaped surface with high level radiant effect for effectively reducing the temperature and keeping the long-term LED lamp performance unchanged. Steel rotation hinge, chrome-plated aluminium body closing ring. Plastic reflector with high definition treatment - medium beam angle. Body adjusted using manually operated device: internal 30° - external 75° - rotation about axis 355°. Supplied with DALI dimmable control gear connected to the luminaire. Warm white high colour rendering index LED CRI (Ra) 90.

Installation

recessed using steel springs in false ceilings with thicknesses starting at 1 mm; preparation hole Ø 100

Dimension (mm)

Ø110x67

Colour

White/Aluminium (39) | Grey/Aluminium (78)

Weight (Kg)

0.52

Mounting

ceiling recessed

Wiring

on control gear box with quick-coupling connections

Complies with EN60598-1 and pertinent regulations

**Product configuration: MN63****Product characteristics**


Total lighting output [Lm]: 656.1
Total power [W]: 13.8
Luminous efficacy [Lm/W]: 47.5
Life Time: > 50,000h - L90 - B10 (Ta 25°C)

Total luminous flux at or above an angle of 90° [Lm]: 0
Emergency luminous flux [Lm]: /
Voltage [V]: -
Number of optical assemblies: 1

Optical assembly Characteristics Type 1

Light Output Ratio (L.O.R.) [%]: 81
Lamp code: LED
ZVEI Code: LED
Nominal power [W]: 11
Nominal luminous [Lm]: 810
Lamp maximum intensity [cd]: /
Beam angle [°]: 28°

Number of lamps for optical assembly: 1
Socket: /
Ballast losses [W]: 2.8
Colour temperature [K]: 3000
CRI: 90
Wavelength [Nm]: /
MacAdam Step: 3

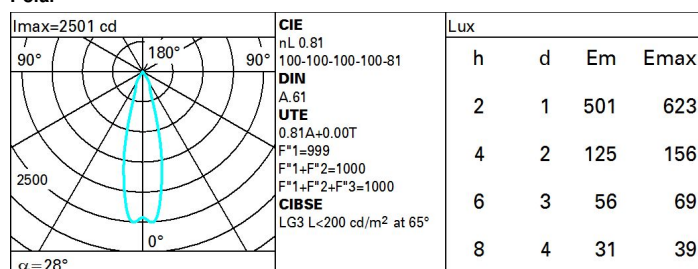Polar

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	73	69	67	65	69	66	66	64	78
1.0	76	73	71	69	72	70	70	67	83
1.5	80	78	76	74	77	75	74	72	89
2.0	83	81	79	78	80	78	77	75	93
2.5	84	83	82	81	82	81	80	78	96
3.0	85	84	83	83	83	82	81	79	98
4.0	86	85	85	84	84	84	82	80	99
5.0	87	86	86	86	85	84	83	81	100

Luminance curve limit

