

Last information update: May 2018



5 - cell Recessed luminaire - LED - Warm white - Incorporated DALI dimmable power supply - Flood optic

Product code
MQ78

Technical description

rectangular miniaturised recessed luminaire with 5 optical elements with LED lamps - fixed optics - flood beam angle. Main body with die-cast aluminium radiant surface, version with perimeter surface frame. Metallised thermoplastic high definition optics, integrated in a rear position in the black anti-glare screen; the structure of the optical system prevents a pinpoint effect, allowing precise, circular light distribution and emission with controlled glare. Supplied with DALI dimmable electronic control gear connected to the luminaire. Warm white LED

Installation

recessed with steel wire springs for false ceilings from 1 to 25 mm thick - preparation hole 37 x 141

Dimension (mm)

148x44x54

Colour

White (01) | White/Brass (41) | Black/Black (43) | Black/White (47) | Grey/Black (74) | (E7)

Weight (Kg)

0.29

Mounting

wall recessed|ceiling recessed

Wiring

on control gear box; screw connections with terminal block included

Complies with EN60598-1 and pertinent regulations



Product configuration: MQ78

Product characteristics

Total lighting output [Lm]: 734.8
Total power [W]: 13
Luminous efficacy [Lm/W]: 56.5
Life Time: 50,000h - L90 - B10 (Ta 25°C)


Total luminous flux at or above an angle of 90° [Lm]: 0
Emergency luminous flux [Lm]: /
Voltage [V]: -
Number of optical assemblies: 1

Optical assembly Characteristics Type 1

Light Output Ratio (L.O.R.) [%]: 80
Lamp code: LED
ZVEI Code: LED
Nominal power [W]: 10
Nominal luminous [Lm]: 920
Lamp maximum intensity [cd]: /
Beam angle [°]: 32°

Number of lamps for optical assembly: 1
Socket: /
Ballast losses [W]: 3
Colour temperature [K]: 3000
CRI: 90
Wavelength [Nm]: /
MacAdam Step: 3

Polar

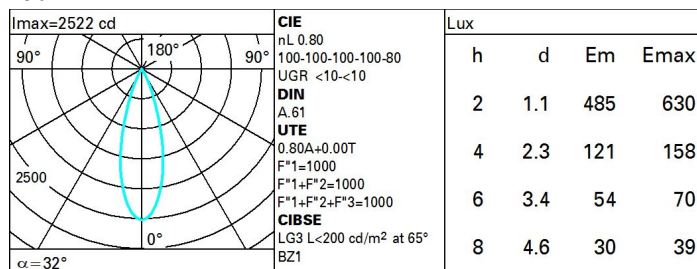

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	72	69	66	64	68	66	65	63	78
1.0	75	72	70	68	71	69	69	66	83
1.5	79	77	75	73	76	74	73	71	89
2.0	81	80	78	77	79	77	76	74	93
2.5	83	82	81	80	80	79	79	77	96
3.0	84	83	82	81	82	81	80	78	98
4.0	85	84	84	83	83	82	81	79	99
5.0	85	85	85	84	84	83	82	80	100

UGR diagram

Corrected UGR values (at 920 lm bare lamp luminous flux)											
Reflect.:		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed					viewed				
x y		crosswise					endwise				
2H	2H	-3.4	-2.9	-3.2	-2.7	-2.5	-3.4	-2.9	-3.2	-2.7	-2.5
	3H	-3.6	-3.1	-3.3	-2.8	-2.6	-3.6	-3.1	-3.3	-2.8	-2.6
	4H	-3.6	-3.2	-3.3	-2.9	-2.6	-3.6	-3.2	-3.3	-2.9	-2.6
	6H	-3.7	-3.3	-3.4	-3.0	-2.7	-3.7	-3.3	-3.4	-3.0	-2.7
	8H	-3.8	-3.4	-3.4	-3.0	-2.7	-3.8	-3.4	-3.4	-3.0	-2.7
	12H	-3.8	-3.4	-3.4	-3.1	-2.7	-3.8	-3.4	-3.4	-3.1	-2.7
4H	2H	-3.6	-3.2	-3.3	-2.9	-2.6	-3.6	-3.2	-3.3	-2.9	-2.6
	3H	-3.8	-3.4	-3.4	-3.1	-2.7	-3.8	-3.4	-3.4	-3.1	-2.7
	4H	-3.9	-3.6	-3.5	-3.2	-2.8	-3.9	-3.6	-3.5	-3.2	-2.8
	6H	-4.0	-3.7	-3.5	-3.3	-2.9	-4.0	-3.7	-3.5	-3.3	-2.9
	8H	-4.0	-3.8	-3.6	-3.3	-2.9	-4.0	-3.8	-3.6	-3.3	-2.9
	12H	-4.1	-3.8	-3.6	-3.4	-2.9	-4.1	-3.8	-3.6	-3.4	-2.9
8H	4H	-4.0	-3.8	-3.6	-3.3	-2.9	-4.0	-3.8	-3.6	-3.3	-2.9
	6H	-4.1	-3.9	-3.6	-3.4	-3.0	-4.1	-3.9	-3.6	-3.4	-3.0
	8H	-4.2	-4.0	-3.7	-3.5	-3.0	-4.2	-4.0	-3.7	-3.5	-3.0
	12H	-4.2	-4.1	-3.7	-3.6	-3.1	-4.2	-4.1	-3.7	-3.6	-3.1
12H	4H	-4.1	-3.8	-3.6	-3.4	-2.9	-4.1	-3.8	-3.6	-3.4	-2.9
	6H	-4.2	-4.0	-3.7	-3.5	-3.0	-4.2	-4.0	-3.7	-3.5	-3.0
	8H	-4.2	-4.1	-3.7	-3.6	-3.1	-4.2	-4.1	-3.7	-3.6	-3.1
Variations with the observer position at spacing:											
S =	1.0H	6.8 / -18.5					6.8 / -18.5				
	1.5H	9.6 / -18.7					9.6 / -18.7				
	2.0H	11.6 / -23.0					11.6 / -23.0				