

Last information update: May 2018

**large body - neutral white - white flood optic**

Product code
P642

Technical description

Adjustable spotlight with adapter for installation on electrified track for a linear PCB LED lamp with a Neutral White (4,000K) tone. Product complete with super pure anodized aluminium reflector to guarantee wide flood light distribution. DALI ballast integrated in the body. Die-cast aluminium optical assembly. Rotates 360° about the vertical axis and tilts 90° relative to the horizontal plane. Passive heat dissipation. Option of installing a range of outdoor accessories including an anti-glare and an asymmetric screen.

Installation

On an electrified track or base

Dimension (mm)

210x146

Colour

Black (04) | Black/White (47)

Weight (Kg)

2.11

Mounting

three circuit track|ceiling surface

Wiring

Product complete with electronic components

Complies with EN60598-1 and pertinent regulations

IP20 IP40 for optical assembly

**Product configuration: P642****Product characteristics**

Total lighting output [Lm]: 3599.6
Total power [W]: 48.1
Luminous efficacy [Lm/W]: 74.8
Life Time: 50,000h - L80 - B10 (Ta 25°C)

Total luminous flux at or above an angle of 90° [Lm]: 0
Emergency luminous flux [Lm]: /
Voltage [V]: -
Number of optical assemblies: 1

Optical assembly Characteristics Type 1

Light Output Ratio (L.O.R.) [%]: 90
Lamp code: LED
ZVEI Code: LED
Nominal power [W]: 43
Nominal luminous [Lm]: 4000
Lamp maximum intensity [cd]: /
Beam angle [°]: 80° / 106°

Number of lamps for optical assembly: 1
Socket: /
Ballast losses [W]: 5.1
Colour temperature [K]: 4000
CRI: 80
Wavelength [Nm]: /
MacAdam Step: 2


Polar

Polar		CIE		Lux				
Imax=1765 cd		nL 0.90		h	d1	d2	Em	Emax
C0-180 γ=18°		64-91-99-100-90		1	1.7	2.7	1088	1614
90° 180° 90°		UGR 27.1-33.2		2	3.4	5.3	272	404
1500		DIN A.51		3	5	8	121	179
0°		UTE 0.90C+0.00T		4	6.7	10.6	68	101
α=80° / 106°		F*1=638						
		F*1+F*2=914						
		F*1+F*2+F*3=990						

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	66	58	53	48	57	52	51	46	52
1.0	72	65	59	55	63	59	58	53	59
1.5	80	74	70	66	73	69	68	64	71
2.0	85	80	77	74	79	76	75	70	78
2.5	87	84	81	78	82	80	79	75	83
3.0	89	86	84	82	85	82	81	77	86
4.0	91	89	87	85	87	85	84	81	90
5.0	92	91	89	87	89	87	86	82	92

Luminance curve limit

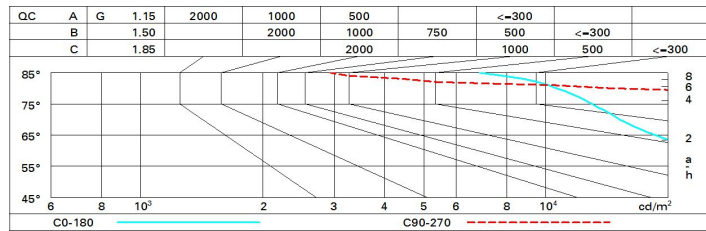

UGR diagram

Corrected UGR values (at 4000 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceill/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim											
x	y										
2H	2H	26.5	27.4	26.8	27.6	27.9	31.8	32.7	32.1	33.0	33.2
	3H	26.4	27.2	26.8	27.5	27.8	31.9	32.7	32.2	32.9	33.2
	4H	26.4	27.1	26.7	27.4	27.7	31.8	32.5	32.1	32.8	33.2
	6H	26.3	27.0	26.7	27.3	27.7	31.7	32.4	32.1	32.7	33.1
	8H	26.3	27.0	26.7	27.3	27.6	31.7	32.3	32.1	32.7	33.0
	12H	26.3	26.9	26.7	27.2	27.6	31.7	32.3	32.0	32.6	33.0
4H	2H	27.2	27.9	27.5	28.2	28.5	33.1	33.8	33.4	34.1	34.4
	3H	27.2	27.8	27.6	28.1	28.5	33.3	33.9	33.7	34.2	34.6
	4H	27.1	27.7	27.5	28.1	28.4	33.3	33.8	33.7	34.2	34.6
	6H	27.1	27.6	27.5	28.0	28.4	33.2	33.7	33.6	34.1	34.5
	8H	27.1	27.5	27.5	27.9	28.4	33.2	33.6	33.6	34.0	34.5
	12H	27.0	27.4	27.5	27.8	28.3	33.1	33.5	33.6	34.0	34.4
8H	4H	27.3	27.8	27.8	28.2	28.6	33.4	33.8	33.8	34.2	34.7
	6H	27.3	27.7	27.8	28.1	28.6	33.4	33.7	33.8	34.2	34.7
	8H	27.3	27.6	27.8	28.0	28.5	33.3	33.6	33.8	34.1	34.6
	12H	27.2	27.5	27.7	28.0	28.5	33.3	33.6	33.8	34.1	34.6
12H	4H	27.3	27.7	27.8	28.2	28.6	33.3	33.7	33.8	34.2	34.6
	6H	27.3	27.6	27.8	28.1	28.6	33.3	33.6	33.8	34.1	34.6
	8H	27.3	27.6	27.8	28.0	28.6	33.3	33.6	33.8	34.1	34.6
Variations with the observer position at spacing:											
S =	1.0H	1.6 / -3.0					0.4 / -0.4				
	1.5H	2.6 / -5.2					0.6 / -1.2				
	2.0H	3.8 / -6.5					1.5 / -1.6				