


Last information update: May 2018

**Minimal Angular Module - General Down Light - Warm LED****Product code**

Q394

Technical description

Angular element for Minimal (frameless) flush with ceiling version profiles; including a Warm LED module. Methacrylate opal screen (diffused general light); screen set up for connecting several lengths by overlapping. Integrated control gear. Pass-through wiring for continuous lines:

Installation

Installation can be recessed, surface, ceiling and pendant-mounted using suitable accessories to be ordered separately.

Dimension (mm)

658x658x105

Colour

Aluminium (12)

Weight (Kg)

5

Mounting

ceiling recessed|ceiling surface|ceiling pendant

Wiring

The angular profile is supplied with pass-through wiring for continuous lines. Quick coupling terminal blocks to simplify connections between the luminaires. LED module complete with integrated electronic control gear.

Notes

Take care when configuring the system; to complete a continuous line with an angular profile correctly, two initial modules are required, one for each side of the corner.

Complies with EN60598-1 and pertinent regulations



IP20

**Product configuration: Q394****Product characteristics**

Total lighting output [Lm]: 3751.4
Total power [W]: 38.6
Luminous efficacy [Lm/W]: 97.2
Life Time: > 50,000h - L80 - B10 (Ta 25°C)


Total luminous flux at or above an angle of 90° [Lm]: 0
Emergency luminous flux [Lm]: /
Voltage [V]: -
Number of optical assemblies: 2

Optical assembly Characteristics Type 1

Light Output Ratio (L.O.R.) [%]: 67
Lamp code: LED
ZVEI Code: LED
Nominal power [W]: 18
Nominal luminous [Lm]: 2800
Lamp maximum intensity [cd]: /
Beam angle [°]: /

Number of lamps for optical assembly: 1
Socket: /
Ballast losses [W]: 1.3
Colour temperature [K]: 3000
CRI: 80
Wavelength [Nm]: /
MacAdam Step: 3

Polar

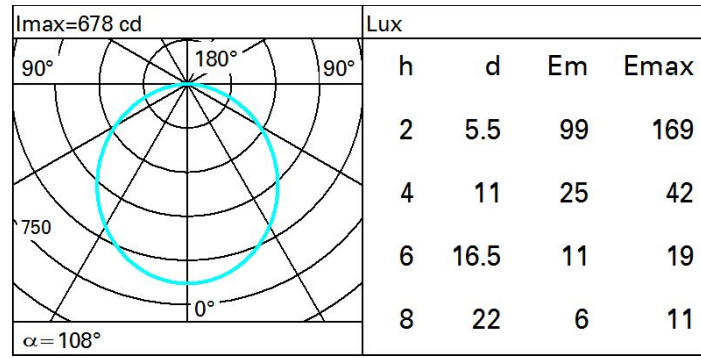

Isolux

