

FLAT MOON 950 CEILING DOWN LED DALI/PUSHDIM/1-10V GI


Contemporary architectural projects love a minimalist, slim lighting design. Flat moon is a stylish, reduced height fixture (78 mm) that distributes a soft, yet functional light. Office-compliant when combined with one of the prismatic diffusers, it is also a perfect fit for public spaces, hotels, restaurants or retail environments. Exceptionally versatile, Flat moon can be either surface-mounted, recessed or suspended (with two types of suspension kits for either down or up/down lighter) and even directly mounted and connected onto the gear. It comes in three sizes: 450, 650 or 950 mm diameter.

Art. Nr. 13291209

SPECIFICATIONS

Lamp	1x med-power LED 129W
Gear / Transfo	LED gear incl.
Weight	17kg
Min. Distance	0.1 m
Power supply	230V
IP	IP20
Glow Wire Test	650°
Lifetime	L80 B20 @ 50.000 hrs
CRI	90
Lumen	13988 Lm
Efficacy	95 Lm/W
UGR	23
Adjustability	Not Applicable

	WARM WHITE 2700K / CRI 90+	WARM WHITE 3000K / CRI 90+	NEUTRAL WHITE 4000K / CRI 90+
black struc	13291232	13291332	13291432
white struc	13291209	13291309	13291409

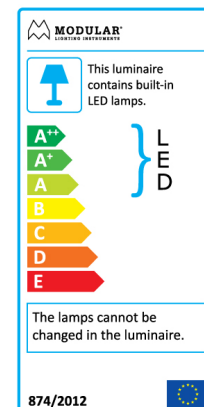

This label is available in other languages:
<http://supermodular.com/assets/TYPE2.pdf>

FLAT MOON 950 CEILING DOWN LED DALI/PUSHDIM/1-10V GI

ACCESSORIES

HUE-MODULE

13190030 | MODULAR CONNECTED 1-10V WHITE COMPONENT

HUE-BRIDGE

70000616 | PHILIPS HUE BRIDGE EU

70000617 | PHILIPS HUE BRIDGE UK

HUE-DEVICE

70000614 | PHILIPS HUE DIMMER SWITCH

70000615 | PHILIPS HUE TAP SWITCH

70000847 | PHILIPS HUE SENSOR

ANTIGLARE

13289500 | FLAT MOON ICE PRISMATIC DIFFUSER 950/970

13289400 | FLAT MOON PRISMATIC DIFFUSER 950/970

