


Mito soffitto 60 up datasheet

Annular LED ceiling-mounted luminaire with single-sided light output and a diameter of 60 cm. There is a choice of two lighting effects. As room lighting, ceiling (narrow) provides a concentrated, dazzle-free light beam for perfect lighting in all situations. wall to wall (wide) for installation on walls especially in halls or corridors in order to brighten up the opposite areas with targeted lighting without dazzling – wide light beam.

Version with integrated power supply unit for mounting on plaster surfaces; connection to 230 V AC mains voltage. Dimmable via trailing-edge phase-cut dimmer*, can alternatively be controlled via Occhio air or DALI. The color temperature can be preset (2700 / 3000 / 3500 / 4000 K) or can be continuously controlled from 2700 to 4000 K via Occhio air or DALI.

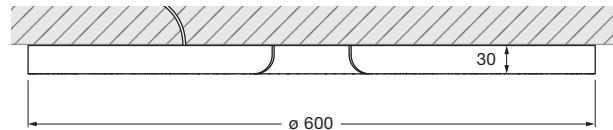

incl. power supply unit


dimensions in mm

technical data Mito soffitto 60 up

properties	material	aluminium, painted, PVD-coated steel, plastic, optical silicon, polyurethane
	weight	5.35 kg
surface	head	bronze, matt gold, rose gold, matt silver, matt white, matt black, phantom, black phantom
	cover	matt white, matt black
Occhio »color tune« LED	average life time	>50.000 hrs
	energy efficiency class (luminous efficiency)	G (43 lm / W)
	power	LED 60 W (incl. Occhio power supply unit approx. 66 W, standby < 0.5 W)
	color rendering index	high color; CRI Ra 95
	color temperature (color consistency)	2700–4000 K (2-step)
electricity	dimming	via trailing-edge phasecut dimmer, Occhio air (optional) or DALI*
	connection	230 V AC
	power factor power supply ($\cos \phi_f$)	0.9
	flicker / stroboscopic effect	1 (PstLM) / 0.9 (SVM)
	permitted operating conditions	max. 30°C for indoor use only


* For a list of compatible dimmers, see www.occhio.de/dim_en, trailing-edge phasecut dimmer, Occhio air and DALI not combinable

Mito soffitto 60 up lighting effects

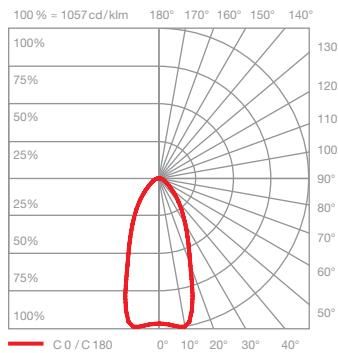


ceiling (narrow)
concentrated light, beam angle approx. 50°
inserts: narrow
luminous flux : high color 60 W 2060 lm

UGR (4H8H) > 19 *

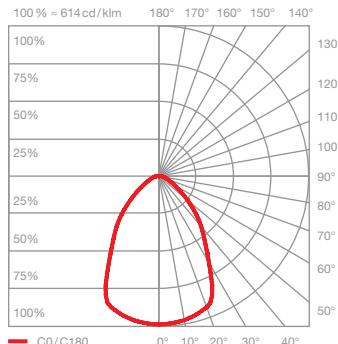

ceiling (wide)
wide-radiation light, beam angle approx. 80°
inserts : wide
luminous flux : high color 60 W 2400 lm

UGR (4H8H) > 19 *

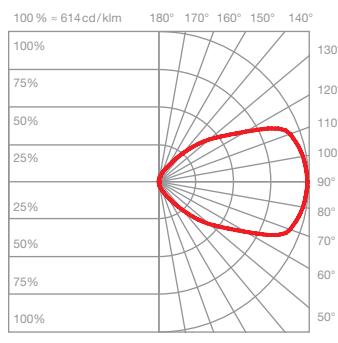

wall to wall (wide)
wide-radiation light, beam angle approx. 80°
inserts : wide
luminous flux : high color 60 W 2400 lm


* The standardized indication of glare values (UGR value – 4H8H) is not quite significant for annular luminaires. In most real applications the result of an individual calculation is a UGR value <19. Therefore, we recommend to carry out a calculation which can be prepared by our lighting design team (project-support@occhio.de).

Occhio

control options

Control

Mito set box

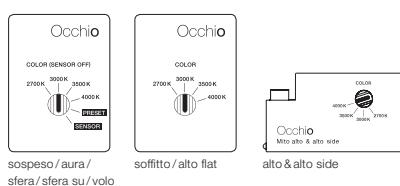

sospeso / aura / sfera / volo:

COLOR (Sensor off)
adjustable color temperature (4 steps)
trailing-edge phase cut dimming possible

PRESET (sospeso / aura / volo)
adjustable color temperature (4 steps)
adjustable up / downlight ratio (5 steps)
trailing-edge phase cut dimming possible


PRESET (sfera)
color temperature adjustable (4 stages)
light intensity adjustable (5 stages)

SENSOR

»touchless control« (gesture control)
switching, dimming, up / down fading*
»color tune« (color temperature continuously
adjustable)
no external dimming possible

*not with sfera

Mito »air« box

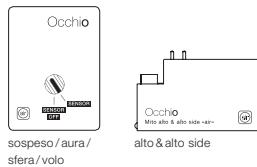

Occhio air (Bluetooth control using Occhio air app) or air controller (optional) control of individual luminaires, groups and scenes

sospeso / aura / sfera / volo:

SENSOR
»air« + »touchless control« (Bluetooth-
and gesture control)
control via »touchless control« and Occhio air app
or »air« controller

SENSOR OFF

»air«
control via Occhio air App or »air« controller
switching, dimming, up / down fading »color tune«
(color temperature continuously adjustable)



terra / largo / raggio:

»air«, »touchless control« and »body sensor«
(raggio / terra) (Bluetooth- and gesture control)
control via »touchless control«, »body sensor«
and Occhio air App or »air« controller

»ambient light control« (terra)
adjustment to ambient light

»presence sensor« (terra)
presence identification and automatically
shutdown by presence sensor


deactivation and adjustable via control
and sensor with »air« app

with Mito »air« box no external dimming possible

alto / alto side:

»air« (Bluetooth - control)
control via Occhio air App or »air« controller
switching, dimming
»color tune« (color temperature continuously
adjustable)

Mito DALI box (control via DALI)

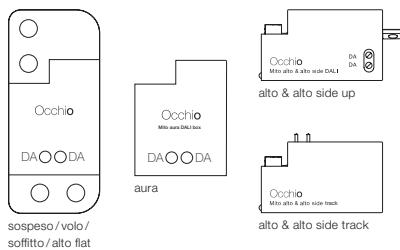

sospeso / aura / volo:

- color tune adjustable*
- adjust continuously dimming
- up + downlight seperate controllable
(two DALI addresses needed)
- no »touchless control«, no fading

soffitto / alto / alto side:

- color tune adjustable*
- continuously dimming

* DALI controller DALI Device type 8 (DT8) for controlling of the color tune necessary further signs on www.occhio.com/dali

Mito soffitto 60 up DALI connection diagram

A maximum of 64 Mito soffitto units can be assigned to each DALI circuit.

The Mito soffitto units can be organized into as many as 16 groups and equipped with an additional 16 scenarios (predefined settings).

Using a DALI short address, they can be actuated and configured individually. In addition, the bi-directional data transfer lets users query the state/status of individual luminaires.

You can find more detailed information at www.occhio.com/dali.

