



# Airliner

## 9536196

Airliner M Wall bracket- 1 LED 2700K Diffuse

## Lighting information



Source power type	1 LED
Colour temperature	2700K
CRI	>90
MCADAMS	3
LM 80/TM-21	L80B10@>60Kh

Source power	9,00 W
Nominal flux	690 lm

Plug-in power	10,50 W
Real flux	85 lm
Beam angle	Diffuse

Power Supply Unit	220 ÷ 240V
Operating frequency	50/60 Hz
Power factor	0,97
Dimmable	Not dimmable
Safety class	I
Luminaires of B16A MCB	Max 50
Wiring	Internal
Connector	To be ordered separately

Protection Rating	IP65
Breaking Strength	IK08

Energy efficiency class	A/A+/A++
Diffuser type	Transparent extra-clear glass
Diffuser thickness	3 mm


## Colours

### Standard colour

● .01 Black      ● .08 Anthracite

### Colours available on request

○ .02 White      ● .04 Green Forest      ● .05 Rose Ballerina  
● .06 Grey      ● .07 Corten      ● .09 Bronze

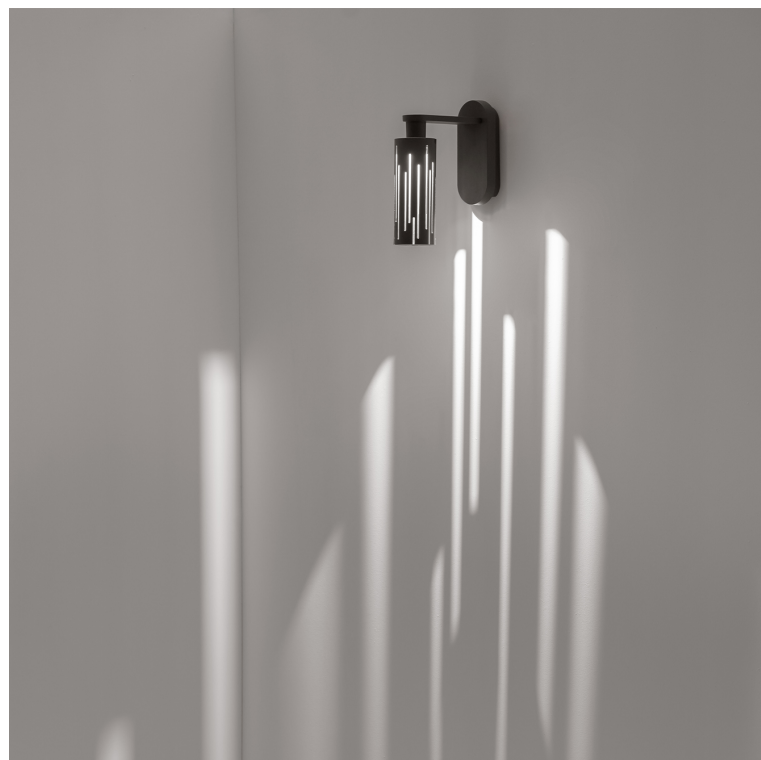

## Platek®

PLATEK s.r.l.  
Via Paderno, 15/F | 25050 Rodengo Saiano (BS) ITALY  
P.IVA 03320290178 | Codice fiscale 03007130176  
Registro delle Imprese di Brescia n. 03007130176 REA 311057  
Capitale sociale Euro 1.000.000,00 i.v. Società con unico socio

Last update:20/03/2025




## Product features

Die-cast body and flange manufactured in EN 44300 aluminium alloy with very low copper content. Diffuser support made of primary aluminum. Diffuser made of AISI 304 stainless steel with laser cutting. Optical system consisting of high-intensity COB LEDs, with a color rendering index greater than 90. No visible screws. Subjected to galvanic anodizing treatment divided into distinct phases: mechanical satin finishing, surface degreasing, anodic oxidation and final sealing. The product is painted following a continuous two step paint process (epoxy-based primer + polyester-based colour finish), which allows to generate a single thick protective coating which then generates a protective barrier against atmospheric agents and UV rays. Before fixing the diffuser on the Platek products a Pre-treatment using an atmospheric pressure plasma process is carried out on the surface. The process activates the ionic load on the surface exactly where it is needed, thus promoting the best silicone grip possible and removing any residual release of agents for a longer lasting seal. The next steps are the coating of silicone and the assembly of the diffuser on the lighting fixture, with an automated process to guarantee the perfect sealing of the lamp.

## Technical dimensions



Image not found or type unknown

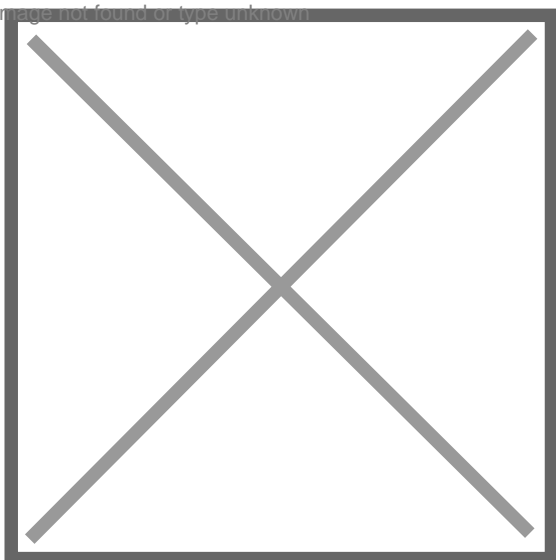

## Technical shipping information

## Lighting information

Grafico flusso / Potenza

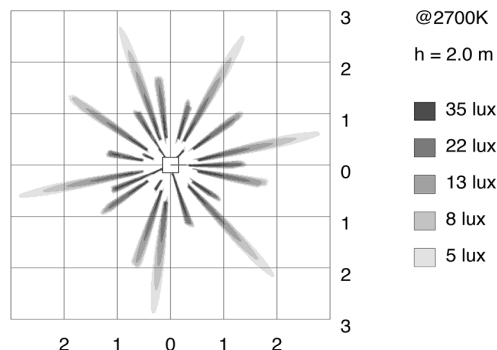

Beam angle

Diffusante

Plug-in power	10,50 W
Real flux	85 lm
Beam angle	Diffuse

Plug-in power	10,50 W
Real flux	85 lm
Beam angle	Diffuse



## Precise LED selection

All LEDs used by Platek, once assembled by trusted personnel are tested with suitable instruments to check the colour specification required by Platek standards. The choice of using only 3 McAdams colour steps and with a CRI value exceeding 90, provide a high level of light quality that is difficult to find in the world of outdoor lighting. As far as LED products are concerned, Platek has adopted a system of protection against electrostatic discharge along the entire production chain of electronic components to increase the resistance of circuits to power surges.

## Electric and thermal protection

The final piece of the Platek puzzle is its scrupulous research into the reliability of its LED products. Precisely to cater for growing market demand Platek has introduced their own electrical protection PCBs, increasing their products resistance to electrostatic discharges and power surges. Furthermore, where possible, additional (NTC) thermal protections are used, which communicate with the power supplies, regulating the electric supply to the Platek LEDs so they operate at a suitable temperature.

## The process of galvanisation and multi-coating protection

Platek goes well beyond the standards required for conventional protection processes, making use of its longstanding and in-depth expertise in aluminium alloys. All the aluminium components of the products - extruded, die-cast or turned - are subjected to a galvanic anodizing process in the phase following mechanical processing. The process increases their wear resistance and improves the adhesion of the paint. Galvanization involves three distinct phases: mechanical satin finishing and surface degreasing, anodic oxidation and fixing. After the first phase that eliminates any impurities, the aluminium body is immersed in special electrolytic tanks, in which the aluminium surface is transformed into aluminium oxide, which makes the metal more resistant. To respond optimally to the needs of the global market, all Platek products undergo a two-layer painting process. After preparation with washing and rinsing in accordance with the strictest environmental standards, the product is coated with an epoxy primer which guarantees, in addition to anodizing, an excellent degree of protection. The final step is the preparation of the polyester powder which gives the final velvety finish of the component. These last two phases, being done in a continuous cycle, form a single high-thickness layer that is resistant to the action of UV rays and atmospheric agents. This process allows corrosion resistance in salt fog that far exceeds the average standards of the market to be achieved.

## The gluing process and plasma treatment

One of the most complex and delicate aspects in outdoor lighting products is the fitting of glass onto the lighting body. This must ensure over time an excellent degree of insulation from atmospheric agents, even in harsh environmental conditions, to maintain a stable performance with zero maintenance. The gluing process of the glass on Platek products is managed at an automated workstation, preceded by a pre-treatment of the surfaces with atmospheric pressure plasma. Pre-treatment modifies the characteristics and ionic properties of the treated surfaces, activates the polar materials at strategic points, removes any residue of detaching agents, such as silicones and oils with a precision microcleaning, favouring excellent wettability of the bonded surfaces and a stable seal in time. The gluing process of the glass with specific plasma treatment allows a bonding force four times greater than similar products to be obtained. The shaping of the surfaces is followed by the application of the silicone and the assembly of the glass onto the lighting body using an automated process that guarantees perfect sealing of the lamp.

## Notes pdf

This document may not be reproduced in any part. All rights reserved. The images, description of the equipment, technical details and photometric values mentioned herein are for information only and do not constitute any commitment on the part of our company, which reserves the right to make any changes it deems appropriate without prior notice. The data in this document are current as of the date indicated. All products listed herein are Registered and/or Patented.