

## Beacon LED Muse II

BEACON LED MUSE II 97CRI 4000K L1 SSC01 BLACK  
2059740



### Product features

- Integrated LED spotlight, black RAL 9005, unique soft-touch ring, adjustable beam angle from a 8° spot to a 55° flood, compact and minimalist design, ideal for museum, gallery and high-end retail applications, die-cast aluminium body, passive cooling heatsink, beam angle: 8° spot to 55° flood, optics: aspheric glass lens, colour temperature: 4000K neutral white, total system power: 21W, total fixture output: 1150lm, luminaire efficacy: 55lm/W, LOR: 100%, colour rendering: Ra 97 typical, R9 value at 90, LED Chromacity: 3 step MacAdam ellipse, lifetime: >72,000 hours at L80B10, energy class: A++, A+, A, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 500mA, electronic driver, SylSmart SSC, power factor: 0.9 electrical protection: CLASS II, 1-circuit track adaptor, suitable for Concord Lytespan 1 track, ingress protection rating: IP20, suitable for internal environment only, horizontal rotation: 355°, vertical tilt: 90°, dimensions: Ø80x135x153mm, weight: 0.95kg.



### PRODUCT OVERVIEW

IPC Code	2059740
Product name	BEACON LED MUSE II 97CRI 4000K L1 SSC01 BLACK
Technology	LED
Housing	Aluminium
Mount	Track mounting
General application	Museums & Galleries
Certifications	EUNEW009
ETIM Class	EC001744
E-number FI	4274031
Fixture luminous flux (lm)	623/1150
Luminaire efficacy (lm/W)	55
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	97
Colour Consistency (SDCM)	3
Photobiological Risk Group	RG1
Total power consumption (W)	21
Product Voltage (V)	240
Electrical protection	Class II
Dimmable	Yes
Housing colour	Black
IP rating	IP20
IK rating	IK02
Product EAN number	5025768597406
Lamps	Yes
Included lamp	INTEGRATED LED

### DATA TABLE

General data

## Beacon LED Muse II

*BEACON LED MUSE II 97CRI 4000K L1 SSC01 BLACK*  
2059740

IPC Code	2059740
Product name	BEACON LED MUSE II 97CRI 4000K L1 SSC01 BLACK
Technology	LED
Housing	Aluminium
Mount	Track mounting
General application	Museums & Galleries
Operating temperature rated (°C)	25
Certifications	EUNEW009
ETIM Class	EC001744
E-number FI	4274031

### Optical data

Fixture luminous flux (lm)	623/1150
Luminaire efficacy (lm/W)	55
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	97
Colour Consistency (SDCM)	3
Photobiological Risk Group	RG1

### Electrical data

Total power consumption (W)	21
Mains voltage (V)	230-240V~
Product Voltage (V)	240
Electrical protection	Class II
Dimmable	Yes
Drive current (mA)	500
Inrush Current (A)	5
Inrush Duration (µs)	50
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	52
Max. Luminaires per 16A C Breaker	85

### Lifetime data

Lumen maintenance - L70 B50	72000
-----------------------------	-------

### Physical data

Housing colour	Black
IP rating	IP20
IK rating	IK02
Nominal Product Width (mm)	135
Nominal Product Height (mm)	153
Nominal Product Diameter (mm)	80
Weight (kg)	2.226

### Packaging

Single packaging type	Carton
Product EAN number	5025768597406

## Beacon LED Muse II





*BEACON LED MUSE II 97CRI 4000K L1 SSC01 BLACK*  
2059740

Packaging single length / height (cm)	17.5
Packaging single width (cm)	15.0
Packaging single depth (cm)	17.5
DUN14 (outer)	05025768597406
Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5


### Safety data

Dry applications use only	Yes
---------------------------	-----

## PHOTOMETRY

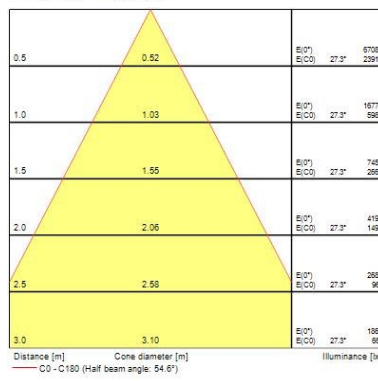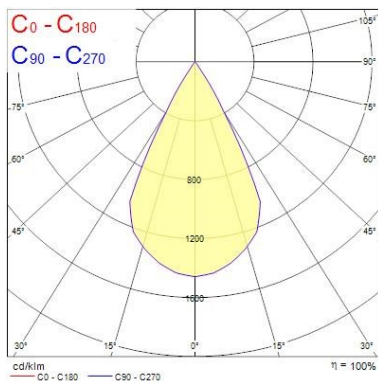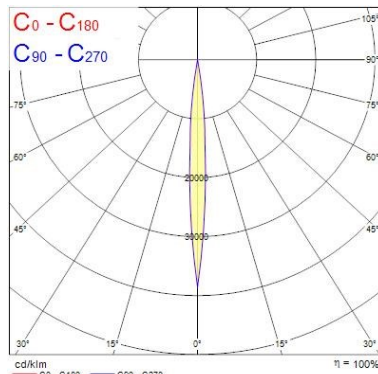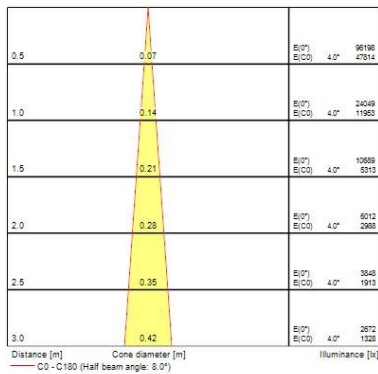


## TECHNICAL DRAWINGS




## Beacon LED Muse II


BEACON LED MUSE II 97CRI 4000K L1 SSC01 BLACK  
2059740


**Concord** 2059740


 This luminaire contains built-in LED lamps

 } LED


The lamps cannot be changed in the luminaire.

874/2012 

 This luminaire contains built-in LED lamps

 } LED

The lamps cannot be changed in the luminaire.

**Concord** 2059740  874/2012