

WIREFLOW

Design by Arik Levy.

VIBIA

Reference

0300.

Application

Hanging lamps

Installation type

Surface

Description

Wireflow designed by Arik Levy. A hanging lamp which reviews and updates the chandelier look through an exercise of simplification that explores its essence and enhances its outline with great delicacy and at the same time a strong formal presence. Its appearance, as a structure of fine cables finished with eight LED terminals, discretely connects with classic chandelier models, taking this type of lamp to a new, groundbreaking and futuristic dimension. Employing CREA product configurator software, the design can be modified to adapt to your specific project requirements.

Diffuser

Pressed-glass diffuser

Materials


Diffuser: Glass
Body: Aluminum
Horizontal rods: Steel
Ceiling rose: Steel

Finish



0300-04 Black lacquer (RAL 9005)

Sketch



Electrical characteristics

8 x LED 4,5W 350mA

Total 35.8 W



Led 2700K CRI >80 3922 lm 109 lm/W

Fixture: 1573 lm 60 lm/W

Driver included: CC - Constant Current 350 mA 100-240V 50/60Hz

Electronic dimming DALI 1-10V PUSH

ficha.fichatecnicaproducto.regulacion.opcional SMART

Physical characteristics

2 Box / 0.09 x 1.62 x 1.63 m. / Vol. 0.3245 m³ /
Gross weight 18.0 kg. / Net weight 15.1 kg.


Installation and assembly

Please, see the installation manual

Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Efficiency : 40.11%

Coordinate system : CG

Total flux : 3922.20

Maximum value : 53.86


Light position : C=15.00 G=55.00

Symmetry on the planes : Double symmetrical

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=2.50m

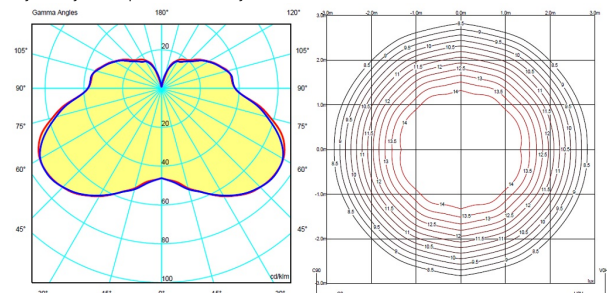

Certificates

