

WIREFLOW

Design by Arik Levy.

VIBIA

Reference

0347.

Application

Hanging lamps

Installation type

Surface

Description

Wireflow designed by Arik Levy. Hanging lamp. Configure hanging light installations from an electrical connection point on the wall with a plug to facilitate installation. With Wireflow you can outline different geometrical shapes on walls or ceilings to create murals with a stunning graphic visual effect. Employing CREA product configurator software, the design can be modified to adapt to your specific project requirements.

Materials


Body: Aluminum
Rods: Steel
Ceiling rose: Steel
Diffuser: Polycarbonate

Finish



0347-04 Black lacquer (RAL 9005)

Sketch




Electrical characteristics

1 x LED 4,5W 350mA



Total 4.5 W



Led 2700K CRI >80 490 lm 109 lm/W

Fixture: 227 lm 70 lm/W

Driver included: CC - Constant Current 350 mA 100-240V 50/60Hz

Electronic dimming PUSH

Technical characteristics

- Plug-in
- Switch on the wall plate

Physical characteristics

1 Box / 0.26 x 0.26 x 0.26 m. / Vol. 0.0175 m³ /
Gross weight 1.5 kg. / Net weight 1.4 kg.


Installation and assembly

Please, see the installation manual

Light distribution

Highlight

Lamp used to highlight a specific element.



Photometric data

Efficiency : 46.23%

Coordinate system : CG

Total flux : 490.30

Maximum value : 320.23


Light position : C=0.00 G=0.00

Symmetry on the planes : Double symmetrical

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=2.50m

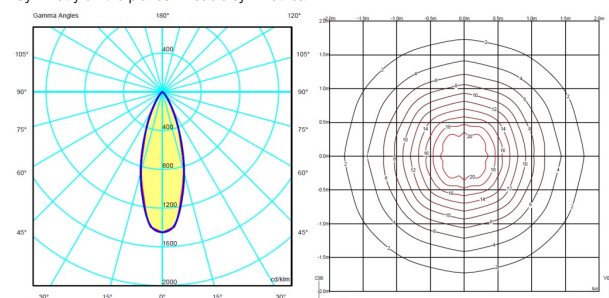

Certificates

IP20



