

ALPHA

Design by Ramos & Bassols.

Reference

7920.

Application

Wall Lamps

Installation type

Surface

Description

Wall light designed by Ramos & Bassols in the form of a circle 10.5cm in diameter. Available in matt white lacquer and chrome, matt black lacquer and chrome, matt graphite lacquer and black and matt white lacquer. LED light source.

Diffuser

Polycarbonate diffuser

Materials

Box: Zamak

Lid: Steel

Finish



7920-03 Matt white lacquer and chrome (RAL 9016)



7920-04 Matt black lacquer and chrome (RAL 9005)




7920-18 Matt graphite lacquer and black (RAL 7016)



7920-93 Matt white lacquer (RAL 9016)

Sketch



Electrical characteristics

1 x LED2,1W 700mA




Total 2.3 W



VIBIA LIGHTING, S.L.U. Barcelona, 72 - 74. 08820 El Prat de Llobregat (Barcelona - Spain). Tel 934 796 970. Fax 934 796 973.
vibia@vibia.com www.vibia.com

VIBIA



Led 2700K CRI >80 199 lm 95 lm/W

Fixture: 81 lm 29 lm/W

Driver included: CC - Constant Current 700 mA 100-240V 50/60Hz

Electronic dimming NO DIM

Physical characteristics

1 Box / 0.13 x 0.20 x 0.21 m. / Vol. 0.0054 m³ /

Gross weight 0.7 kg. / Net weight 0.6 kg.


Installation and assembly

Please, see the installation manual

Light distribution

Orientation

Lamp having a beam powerful enough to define profiles and the surrounding architecture.



Photometric data

Efficiency : 75.87%

Coordinate system : C-G

Total flux : 81.00 lm

Maximum value : 672.89 cd/klm

Light position : C=285.00 G=110.00


Symmetry on the planes : Symmetrical planes

270-90

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=3.00m

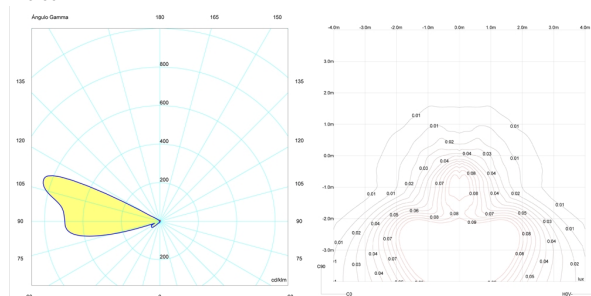

Certificates



